

Master Catalog

Specialized Roofing Products, Tools, Equipment, Metal Accessories, Custom Product and Welding



Ontario Roofing Supply Inc.

Quality Products & Metal Accessories

647-894.9464

Info@ontarioroofingsupplyinc.ca



Ontario Roofing Supply Inc.

Quality Products & Metal Accessories

647-894.9464

Info@ontarioroofingsupplyinc.ca

51 Roysun Rd. Unit#9, Woodbridge, ON L4L 8P9

Phone: 647-894.9464

info@ontarioroofingsupplyinc.ca

Quality Metal Roofing Products And Custom-Made products





YOUR ONE STOP SHOP FOR ROOFING MATERIALS

"SPECIALIZED ROOFING PRODUCTS"


647-894.9464



MANUFACTURERS OF METAL ROOFING PRODUCTS AND ACCESSORIES
CUSTOM WORK IN COPPER, ALUMINUM, GALVANIZED AND STAINLESS STEEL




SCUPPER PRODUCTION SKETCH

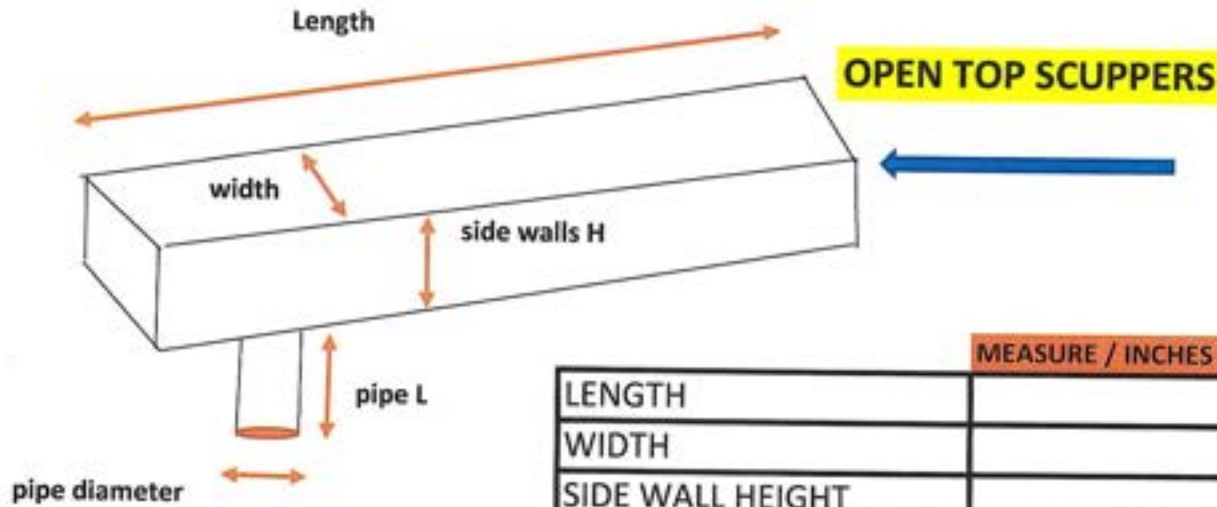

OPEN TOP SCUPPERS

	MEASURE / INCHES
LENGTH	
WIDTH	
SIDE WALL HEIGHT	
DOWNPIPE LENGTH	
DOWNPIPE DIAMETER	


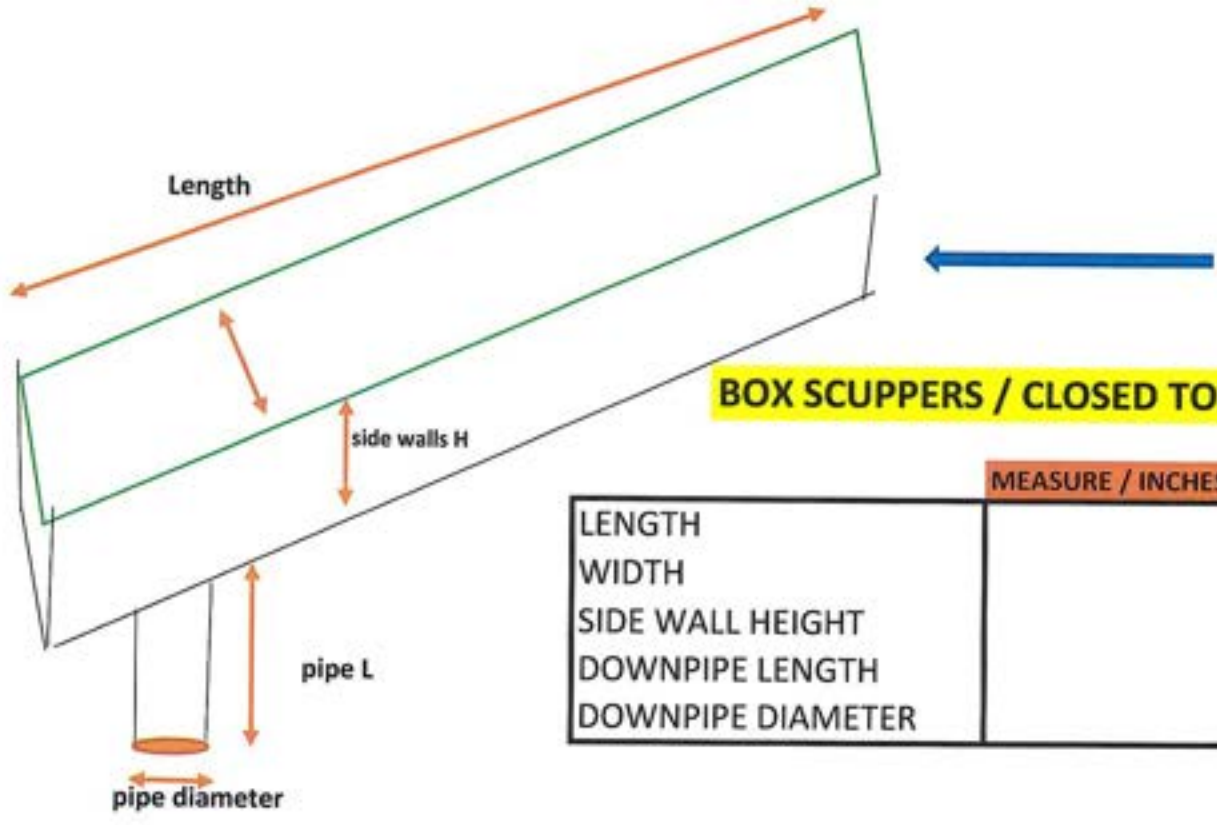


BOX SCUPPERS / CLOSED TOP

	MEASURE / INCHES
LENGTH	
WIDTH	
SIDE WALL HEIGHT	
DOWNPIPE LENGTH	
DOWNPIPE DIAMETER	

PARAPET WALL SCUPPER DRAWING

ORS Inc.
Ontario Roofing Supply Inc.
Quality Products & Metal Accessories
647-894.9484
Info@ontarioroofingsupplyinc.ca

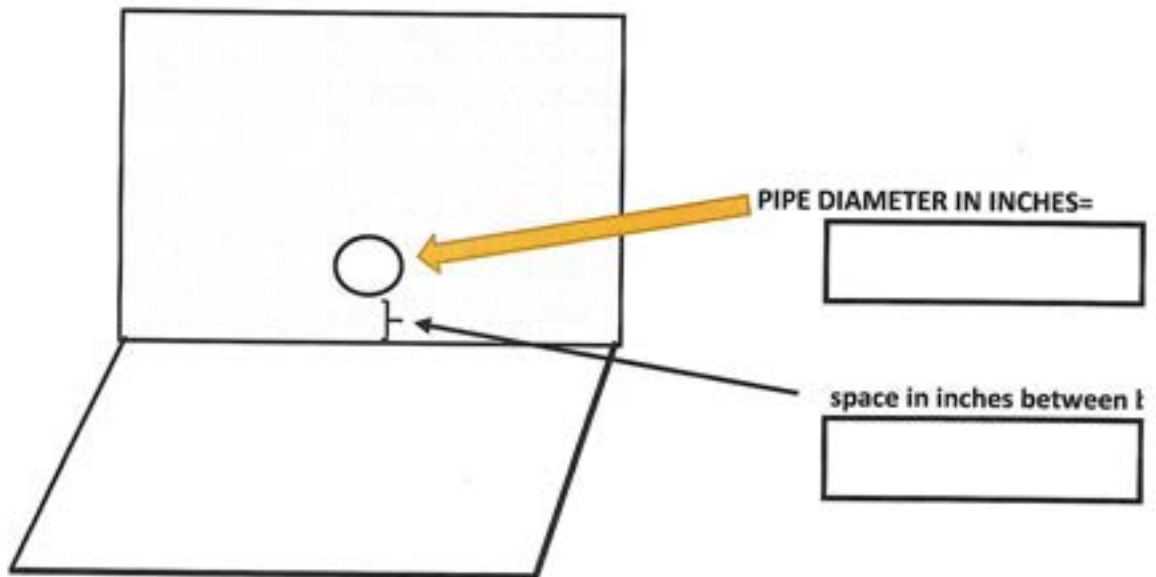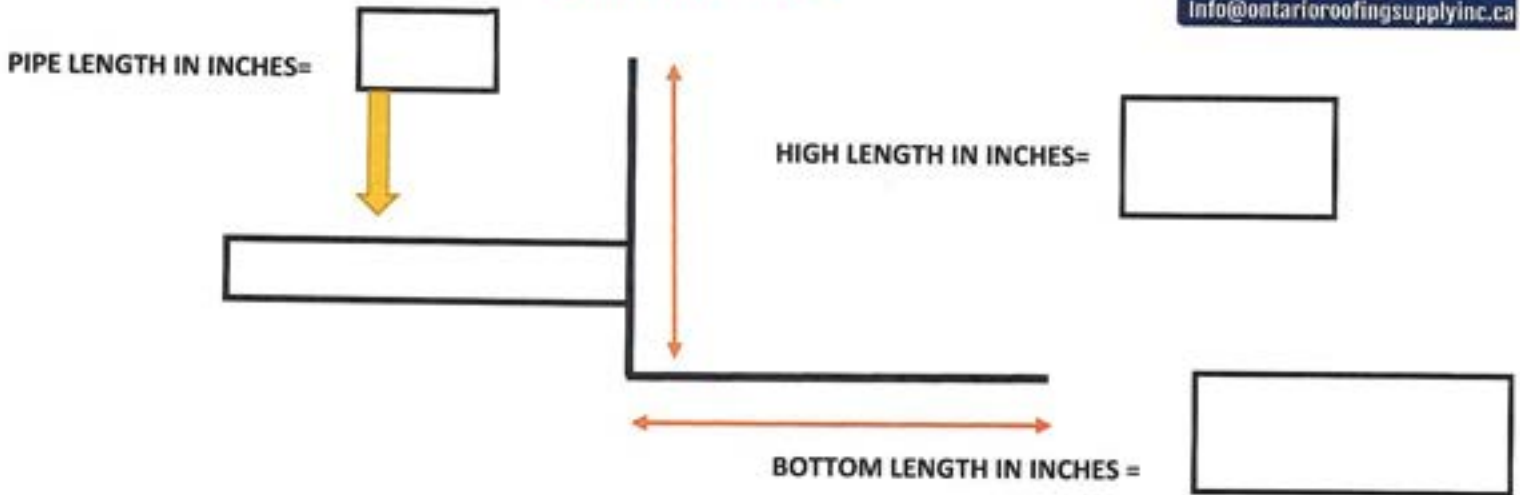

DRAINS PRODUCTION SKETCH

CUSTOMER: _____
DATE: _____

STANDARD PIPE LENGTH IS 12"

ALUMINUM

COPPER

ECONOMY TYPE



ALUMINUM :
COPPER:
PIPE LENGTH (INCHES): _____
DIAMETER (INCHES): _____
ORDER QUANTITY: _____

PREMIUM TYPE WITH OPEN TOP DOME



ALUMINUM :
COPPER:
PIPE LENGTH (INCHES): _____
DIAMETER (INCHES): _____
ORDER QUANTITY: _____

FLAT DRAIN NO DOME



ALUMINUM :
COPPER:
PIPE LENGTH (INCHES): _____
DIAMETER (INCHES): _____
ORDER QUANTITY: _____



Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894.9464
info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

WASHROOM FLASHING A3PH / A4PH





ONTARIO ROOFING SUPPLY INC.

U FLOW SEALS

U-FLOW MECHANICAL SEAL

The seal is activated by tightening the internal screws with the U-Flow screwdriver. This compresses the thermoplastic seal, forcing it to expand and make contact with the wall of the old pipe, thus preventing vertical movement and stopping water backup damage.

Provides a watertight seal that prevents damage from water back-up.

Feature tough nylon flanges, stainless steel screws and EPDM rubber gaskets. Available in 3-in., 4-in., 5-in. and 6-in. sizes.





ONTARIO ROOFING SUPPLY INC.

STRAINERS

COMES IN 8" OR 5"





Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894.9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

POLY DOME 12"

B2DM PLASTIC ROOF DRAIN DOME 12



STACK JACKS VENTS

- 07" material thickness
- 12.6" tall without cap
- Stack top opening 4.88"
- Complete with either 3" or 4" cap
- Available with either 3" or 4" Cone Cap or Vandal Proof Cap
- Vent Stack flashing to be used on vent pipes such as Soil Stacks or Sanitary pipes
- Heavier grade quality aluminum than the other brands
- No oil residue as with others



SPUN ALUMINUM TALL CONES


- Spun aluminum cones without welded seams
- Available in sizes 1 1/2", 2", 3", 4", 5", 6" in .06mm material thickness
- Available in sizes 7", 8", 9", 10", 12" in .08mm material thickness
- Available in sizes 14", 16", 18", 20", 22" and 24" in 2mm material thickness
- Accommodates standard tall cone collars
- High quality and heavier gauge aluminum than most other brands
- Made from premium grade 1060 aluminum
- Simple and easy to install





Medium Wall, Polyolefin Heat-shrinkable Tubing / Heat-Shrinkable Tubing Product Facts

- Withstands mechanical abuse for increased product reliability
- Highly resistant to impact and abrasion
- Installation is fast and easy
- Resistant to chemicals and moisture
- Adhesive-lined version provides a complete moisture-proof seal preventing corrosion of underlying components
- RoHS compliant

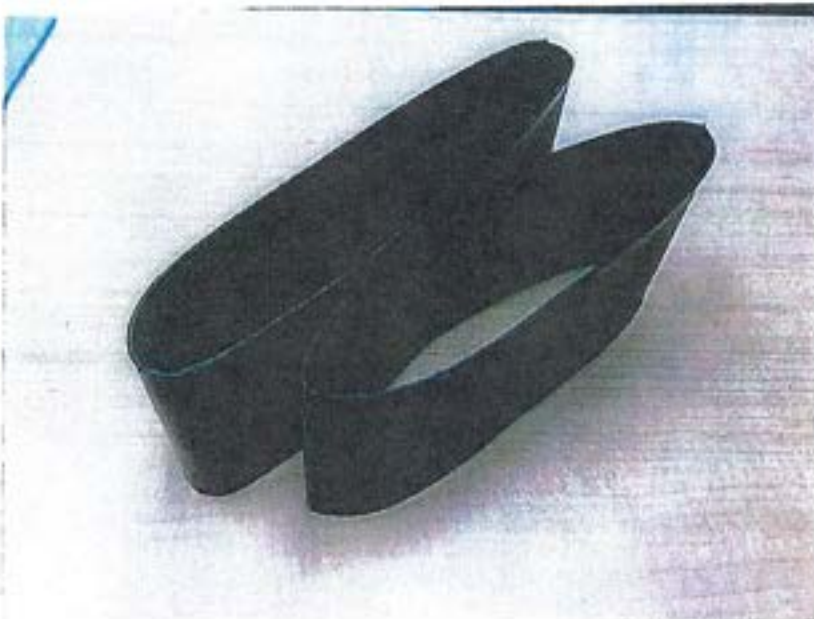



Ontario Roofing Supply Inc.
Quality Products & Metal Accessories


647-894.9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

Scuppers / Pitch pockets

WE DO CUSTOM MADE, AND STOCK STANDARD MEASURES
OUR SCUPPERS ARE MADE WITH ALUMINUM OR COPPER AND TIG WELDING, RUSTPROOF AND ANTI-LEAK.

PITCH POCCKECKTS OR PITCH PANS ARE PRE-PRIMED AND BOXED READY TO GO

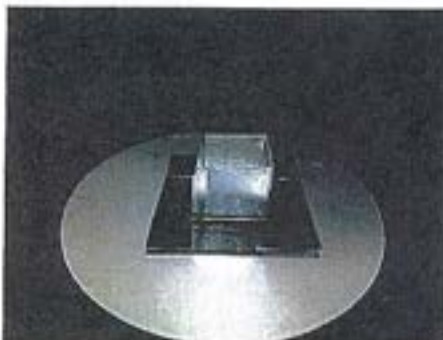

ORS Inc.
Ontario Roofing Supply Inc.
Quality Products & Metal Accessories
647-894.9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.





Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894.9464
info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

PORTAL PLUS FLASHINGS

SELECT A CAP FOR EACH BASE REQUIRED



C-126
1 - 2" TO 6" PIPE



C-412
4 - 1" TO 2" PIPES





C-481
4 - .375" TO 1" PIPES



C-212
2 - .375" TO 1" PIPES
2 - 1" TO 2" PIPES



C-182
1 - 8" TO 12" PIPE



*For use with C-182



PORTALS PLUS™

BY duravent™



DECK-MATES

Flashings for metal roof and wall systems

The Deck-Mate flashing incorporates a stepped profile which creates a compression seal between the schedule 40 piping and the flashing. Deck-Mates are designed with proper reinforcing ribs to allow the flashing to maintain rigidity and the shape of the product. By combining the stepped profile and the reinforcing ribs, the product will properly accommodate the use of a stainless steel clamp. The clamp is crucial in maintaining a water-tight seal for years to come.

All other products on the market incorporate the use of caulk to seal the penetration. The National Roofing Contractor Association states, in their better roofing practices, that caulk should never be used as a primary sealer of a penetration.



EPDM (Gray)



Black



Brown



Dark Blue



Dark Green




Light Green



Terra Cotta

The Deck-Mates are designed to accommodate projections from .125" - 26" in diameter and work in conjunction with any configuration of corrugated metal roof. The product is engineered to incorporate a dead soft aluminum flange that bends to any contour, roof irregularity or pitch. Deck-mate is available in two styles, the standard for normal penetration, and Retrofit for piping that can not be disconnected. Flashings are also available in two materials, standard EPDM (grey standard), DM3 and DM5 (black, brown, dark blue, dark green, light green, and terra cotta), and high temperature Silicone (terra cotta).

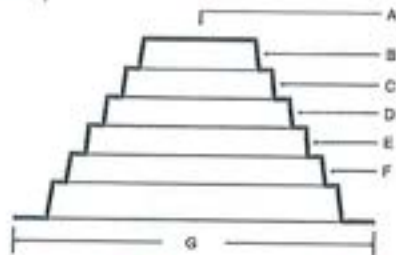

	DM0	DM1	DM2	DM3	DM4	DM5	DM6	DM7	DM8	DM9	DM10
A		0.3		0.5							
		0.8 - 1.0		0.5 - 0.7							
		1.1 - 1.3		0.7 - 1.1							
		0.1 - 0.9		1.1 - 1.3							
B		1.4 - 1.7	1.45 - 1.65	1.3 - 1.85	3.25 - 4.25	4.2 - 5.4	5.4 - 6.4	6.4 - 7.4	7.4 - 8.4	10.5 - 12.5	12.5 x 13.8
C		1.8 - 2.3	2.1 - 2.8	2.1 - 2.8	4.25 - 5.3	5.4 - 6.4	6.4 - 7.4	7.4 - 8.4	8.4 - 9.4	12.5 x 13.8	13.8 x 15.8
D			2.8 - 3.25	3.25 - 4.25	5.3 - 6.4	6.4 - 7.4	7.4 - 8.4	8.4 - 9.4	9.4 - 10.5	13.8 - 15.8	15.8 x 17.8
E					6.4 - 6.9	7.4 - 8.4	8.4 x 9.4	9.4 - 10.5	10.5 - 11.5	15.8 - 17.8	17.8 x 19.8
F								10.5 - 11.5	11.5 - 12.5		19.8 x 25.8
G	2.25 x 2.25	5 x 5	6.25 x 6.25	7.6 x 7.6	9.7 x 9.7	12.3 x 12.3	12.3 x 12.3	17 x 17	18.2 x 18.2	24.8 x 24.8	30.2 x 30.2

All sizes shown are in inches.

Furnish and install the Portals Plus Deck-Mate as manufactured by Hart & Cooley, Inc., Grand Rapids, MI, at all points where pipes 26" or less penetrate the metal roof and wall system. The Deck-Mate shall be EPDM or Silicone (high temperature) compression molded rubber. EPDM Deckmates shall have a serviceable temperature

range of -60°F to +270°F, and Silicon Deckmates shall have a serviceable temperature range of -100°F to +500°F, and both shall be resistant to ozone and ultraviolet. Unit shall have 1" wide corrosion resistant flexible aluminum base. The Deck-Mate shall also include Portals Plus' Snaplock Clamp (except DM0).

NOVA FLEX

Metal Roof Sealant



- Neutral cure silicone
- Excellent adhesion
- Permanently flexible
- Extrudes to -20°F
- Adheres to:
 - Metals
 - Wood
 - Masonry
 - PVC/PVDF
 - Common Construction Materials
- Also used as
 - Gutter Sealant
 - Chimney Flashing
 - Snow Guard
 - Pipe Boots



Commercial Moisture Cure Sealants

#9600 JOINT & TERMINATION SEALANT

A 100% solids, moisture cure urethane adhesive/sealant primarily intended for sealing large joints and termination bars. Lucas #9600 contains no solvents or other volatile ingredients and will not shrink. Outstanding adhesion to metal, concrete, masonry, wood, EPDM, PVC, vinyl surfaces, silicone surfaces and most other common building materials. This sealant has minimal odor, contains no solvents and contains less than 10 grams per liter VOC. Available in 8 colors.



Available Sizes*

10 oz. tubes	20 oz. sausages	2 gal. pails
✓	✓	✓

Available Colors

Black	White	Med Bronze	Bronze	Dark Gray	Gray	Limestone	Terra Cotta

*Actual colors may vary. Contact your local sales representative for samples.

#4500 SEMI-SELFLEVELING SEALER

Lucas #4500 is a 100% solids, moisture-cure urethane sealant. Use to construct liquid flashing systems on all types of roofs. Resistant to grease, fats and oils. Available in white, gray and black.

#4400 SELF-LEVELING SEALANT

Lucas #4400 is a high-solids, non-shrinking, self-leveling sealant for joints in horizontal concrete construction. Ideal where a fast setting, nonshrinking, low odor, low modulus sealant may be required. Suitable for immersion applications in non-potable water. Resistant to greases, fats and oils. Available in gray.



Available Sizes

28 oz. tubes	2 liter pouch	1.5 gal. pails*
✓	✓	✓

Available Colors

Black	White	Gray

*Actual colors may vary.

Available Sizes

10 oz. tubes	2 liter pouch
✓	✓

Available Colors

Gray

*Actual colors may vary.

Henry

KOP-R-LASTIC™

THERMOPLASTIC SEALANT



Features and Benefits:

- 15-year warranty
- Highly elastic – stays flexible without cracking
- Excellent adhesion – even on wet surfaces
- Excellent low temperature flexibility
- No primer needed
- Non-sagging
- Skins over, tack-free within 30 minutes
- Serviceable over a wide temperature range from -29°C to 71°C (-20°F to 160°F)

Kop-R-Lastic is a one-part, high-performance synthetic rubber sealant, which is quick drying and flexible. It exhibits excellent adhesion to a variety of construction materials including metal, aluminum, concrete, masonry, wood, PVC/vinyl, glass, and more.

It is used as a termination sealant in both vertical or horizontal joints – in both exposed and concealed applications. It is ideal for use in masonry joints, metal flashing, glazing, and window and door applications. Kop-R-Lastic can also be used as a termination sealant in conjunction with Henry® BlueskinVP® 100 and 160 self-adhered water resistive air barrier membranes.

Size: 300 ml (10.1 Fl. oz.) cartridge.

Coverage: 5.5m to 7.5m (15-25 feet) per cartridge.

Limited Material Warranty: For further warranty details, see the Technical Data Sheet or our website at www.ca.henry.com/warranty.



Standard colours. Slight colour variation due to printing.

Henry Company
999 N. Sepulveda Blvd., Ste 800
El Segundo, CA 90245

1-800-486-1278
www.ca.henry.com
©2014 Henry Company. All rights reserved.



ITEM 611.3CA.B002 REV0714

SELF LEVELING PITCH POCKET FILLER & POLY PANS

Lucas #4500 is a 100% solids moisture-cure urethane sealant. Use to construct liquid flashing systems on all types of roofs. Resistant to grease, fats, and oils. Compatible with Lucas modified urethane and water-based acrylic coatings. Ideal for sealing metal roof seams and fasteners and miscellaneous repairs on single ply membranes. Available in White, Black, and Gray.



SPRAY FOAM & TAPES



Metal Color Screws with neoprene washers

#10 & #9 / 1 1/2" & 2" / Available in different colors



Head Size - 1/4"



#10 Metal Roofing Screws



Ontario Roofing Supply Inc.

Quality Products & Metal Accessories

647-894.9464

info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

One-Stop Shop For All Your Roofing Needs

Standard Premium Colours



Aged Copper
SCVA-730



Black Coffee
SCQC-18326



Evergreen
SCVA-776



Metallic Copper
SCVA-915



Deep Grey
SCRAL 7037



Patani Green
SCVA-765



Simply White
SCQC-8783

Standard Premium Colours



Midnight Black
SC 607



Chestnut Brown
SC 871



Brushed Zinc
Brosse SC 001



Brushed Zinc
Quartz SC 002




Brushed Charcoal
Renaissance SC003



Brushed Bronze
Renaissance SC004

Brushed Colours

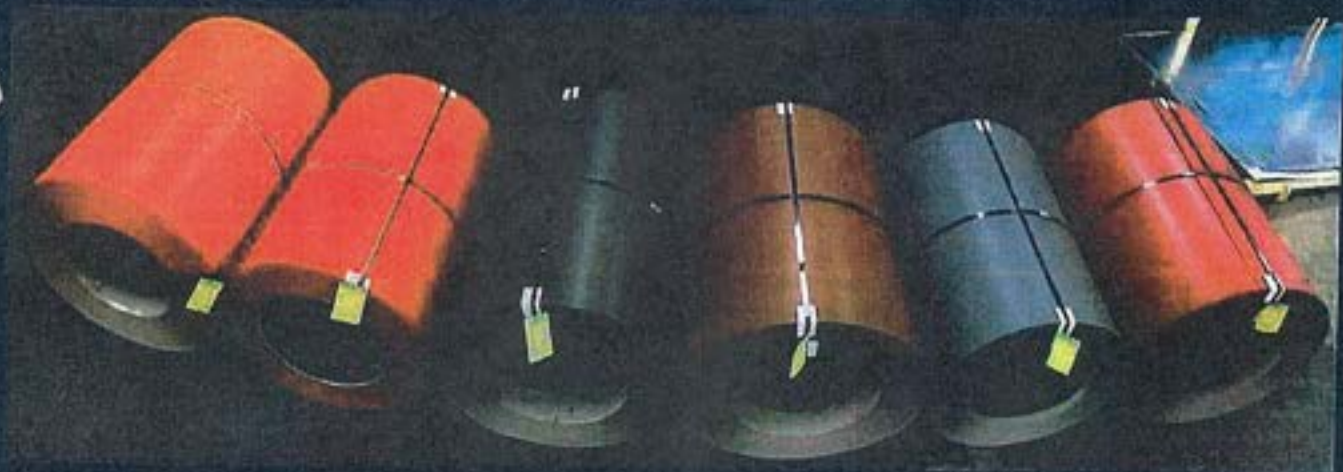

Regular Colours



Terra Cotta Matte
RAL 8004



Oxide Red Matte
RAL 3009



Black Matte
RAL 9005



Chocolate Brown
Matte RAL 8017



Mocha Brown Matte
RAL 8019



Graphite Grey
RAL 7024



Wine Red Matte
RAL 3005

Or ideal roofing

Company Limited, Manufacturers



Estier to do Business with...
AGWAY METALS INC.
...pour vous faciliter les Affaires



ONTARIO ROOFING SUPPLY INC.

EXPANDING TAPE - EMSEAL



EMSEAL

Gaskets, Tapes and
OEM Sealants

25V is a preformed expanding foam sealant produced by impregnating permanently elastic, high-density, open-cell polyurethane foam with water-based, polymer-modified asphalt. • Partially filling the open-cells with the impregnation and then compressing the material results in levels of sealing depending on the degree of compression. • Typically, approximately 4-times compression is required for weathertightness in applications in the vertical plane.

Advantages • Durable primary seal • Permanently elastic and weather-tight • Follows joint contours • Difficult to vandalize • Backpressure of foam maintains seal, minimizes tension on substrate and reduces possibility of failure due to weak or improperly prepared substrates • Exposed face remains flat regardless of variation and changes in joint width and compression



Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894.9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

HOT AIR HAND WELDER

RKN-1600 120 VOLT 1600 WATT HOT-AIR HAND WELDER WITH CASE!


THE ONLY HEAT GUN WITH AUTOMATIC COOLING SHUT OFF!

SIMPLY CLICK THE ON/OFF SWITCH TO "OFF"

NO NEED TO ADJUST THE TEMPERATURE KNOB TO COOL DOWN!

THE BLOWER WILL TURN OFF SAFELY ONCE A COOL TEMPERATURE IS ACHIEVED

1 YEAR WARRANTY!

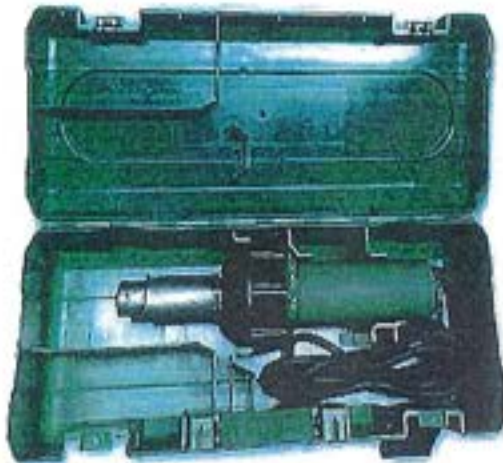

WE SHIP NATIONWIDE!

NOZZLES ANY SIZE ANY ANGLE ONLY \$65 EACH!



- 1. 20mm 90° Nozzle
- 2. 20mm 60° Nozzle
- 3. 5mm Round Nozzle
- 4. 20mm Nozzle
- 5. 40mm Nozzle

CALL FOR PRICING & QUANTITY DISCOUNTS AVAILABLE

LEISTER

Leister
Authorized
Distributor

PLASTIC WELDING



Swiss
made





Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894.9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

ROOFING TORCHES

MODEL S-50 / DETAIL 10"



MODEL XLE-70/ EXTRA LONG 24"



MODEL CXLE-70 COMBO



Magnum Torches

First torch on the market specifically manufactured with the roofer in mind. Made of brass, lightweight, properly balanced. Powerful, strong and with optimum directional control. Only torch on the market that has a 33 foot hose.







Ontario Roofing Supply Inc.


Quality Products & Metal Accessories

647-894.9464

Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

LIQUID AND VAPOUR REGULATOR

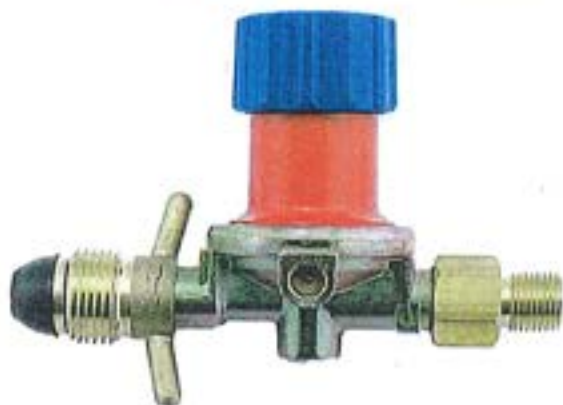

ORS
Inc.
Ontario Roofing Supply Inc.
Quality Products & Metal Accessories
647-894.9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

PROPANE HOSES & PARTS






Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894.9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.


Roll Puller / Shepperd Crooks Handheld thermometer

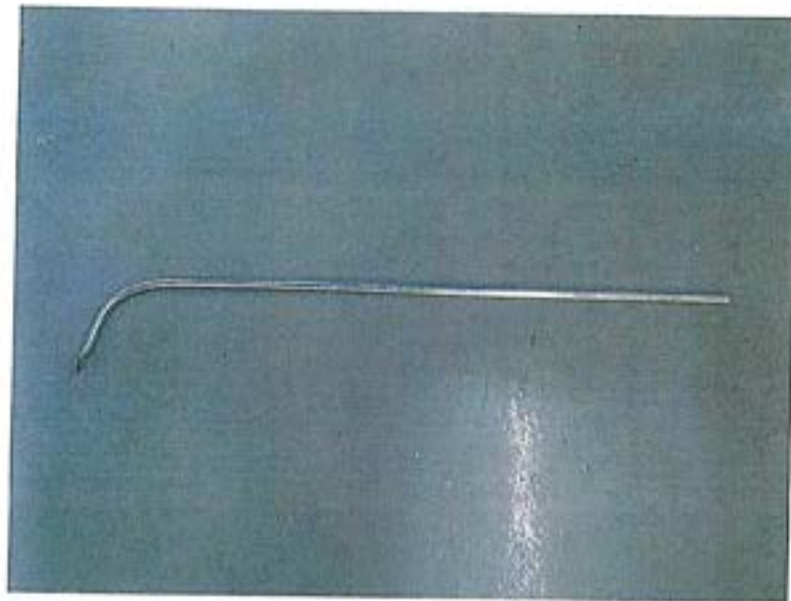

12" Thermometer sold separate.




TOOLS

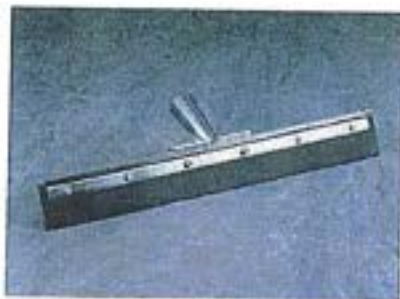

ORS Inc.
Ontario Roofing Supply Inc.
Quality Products & Metal Accessories
647-894-9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

WATERPROOFING TOOLS

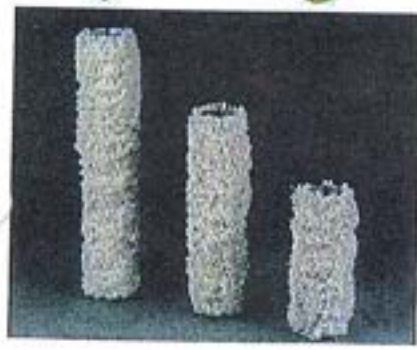

SEAM ROLLERS



3095



3091



3097



3093





Ontario Roofing Supply Inc.

Quality Products & Metal Accessories

647-894-9464

Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

PITCH HOODS & CREAMS








Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894-9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

BROOMS & BRUSHES

CORN BROOMS, STABLE BROOMS, PUSH BROOM, WOOD HANDLES, BRUSHES.

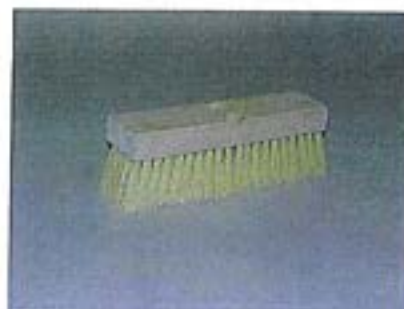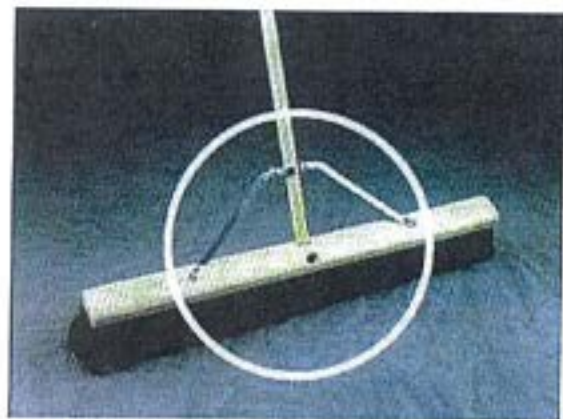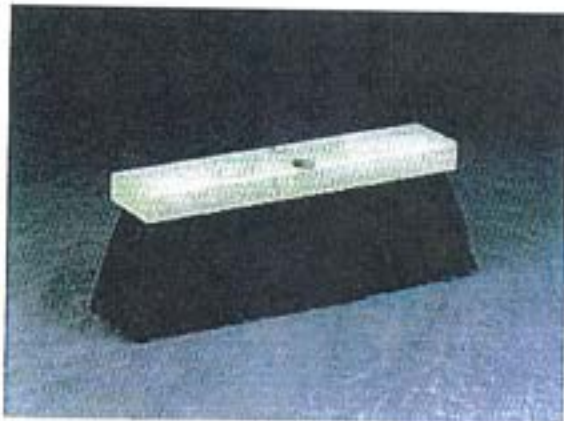


ROOFING PIPES PARTS

2" AND 1-1/2" UNION, COUPLING, ELBOWS AND TEST PLUG



HOISTING PARTS CABLES, YARDING BLOCKS AND HOOKS

HOIST CABLES 3/16" AND 1/4" IN DIFFERENT LENGTHS



ROOFING HOISTING PINS

Spring Lock Pin, Round Back 3/8" SMALL "D" SHAPE

Spring Lock Pin, Square Back 5/16" BIG SQUARE SHAPE

LONG AND SHORT HAND STRAIGHT PINS



ROOFING TOOLS

MANILA ROPE



YELLOW POLYPROPELENE ROPE



HOISTING GIN WHEEL AND LADDER WHEEL



ROOFING TOOLS

GARDEN "D" HANDLE SPADE



48" LONG HANDLE SPADE



REPLACEMENT HANDLES



YUKON SHOVEL



COAL SCOOPS #6 #8 & #10



PICKS & MATTOCKS



**ORS
Inc.**
Ontario Roofing Supply Inc.
Quality Products & Metal Accessories
647-894.9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

SPUD BAR AND BLADES

3 1/2" AND 7"



ROOFING TROWELS

2" X 5" SQUARE MARGIN TROWEL



2" X 7" ROUND NOSE TROWEL



2" X 7" SKINNY DETAIL TORCHING TROWEL



6" HAND SPREADER





ONTARIO ROOFING SUPPLY INC.

ROOFING TOOLS



CUTTING TOOLS / BLADES

UTILITY AND HOOK BLADES, MADE IN ENGLAND (PREMIUM QUALITY) BOX OF 100 / 20 PACKS OF 5 BLADES.



EPDM AND TPO SCISSORS



ROOFING WOOD HANDLE AND PREMIUM GRIP KNIVES, CORE /SAMPLE CUTTER



CUTTER MACHINES BLADES





DELUXE HOISTING TARPS, LEAK DIVERTERS, POLYTARPS AND SAFETY FENCE MESH



The Roofer's Garbage Tarp

Called by many names by many different customers...


- Garbage tarps
- Trash tarps
- Rubbish tarps
- Roofer tarps
- Roofing debris tarps
- Disposal tarps
- Canvas roofer tarps

No matter what you call it our line of deluxe canvas garbage tarps are ready for rough service.

These deluxe roofer tarps are constructed from heavy duty canvas and high strength vinyl coated mesh

- All canvas is treated for rot, mould/mildew, and water resistance for wet applications
- All roofer tarps have heavy duty stitched hems and seams.
- All thread is high strength and UV resistant. thread
- 2" seatbelt webbing reinforcement
- 1 piece delta rings at each corner - forged for strength, not welded

Roof Top BLTBOX

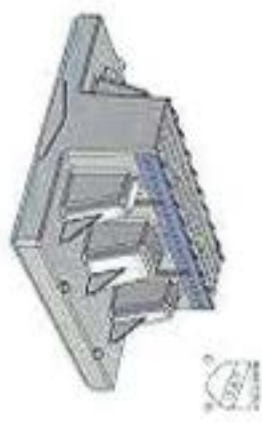

Adjustable Piping Support
New! Backed by a 20 Year Warranty!
US PAT. 7,728,181
CAN. PAT. 2,875,158



ROOFTOP PIPE SUPPORT BLOCK



PART No. QB-1



Features:

- 100% Recycled rubber.
- Compatible with most rooftop materials
- Dampens vibrations.
- No need for supplemental rubber pad.
- Will not float.
- Will not deteriorate.


Applications:

- Air Conditioning
- Cable tray
- Electric Conduit
- Ducts
- HVAC
- Pipes
- Roof walks...



TS-22 Series
Pipe Strap
Previous Page

QUICK DRY PRIMERS

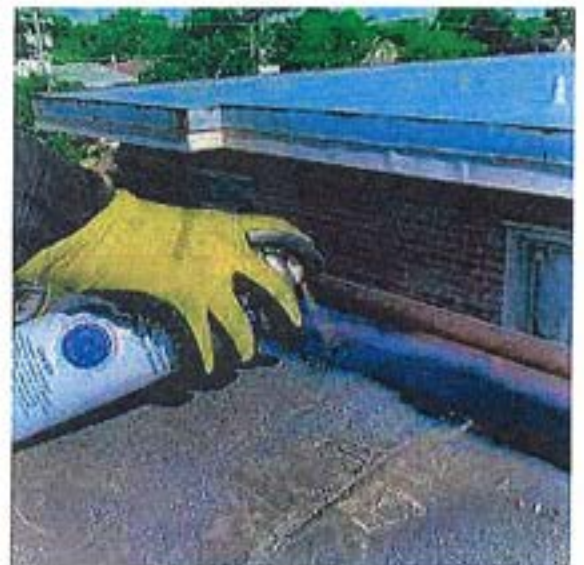

LUCAS

Coatings, Sealants and Adhesives

LUCAS ROOFING PRODUCTS



LUCAS

Coatings, Sealants and Adhesives

**NEW LOOK...
EXCEPTIONAL
RESULTS**



Contractors across the country rely on **LUCAS Repair Products** for the reliability and ease of application to most common building materials. To learn more visit www.rmlucas.com.

LUCAS... Done Right

RM LUCAS Co. • Chicago • Orlando • Phoenix • 773.523.4300 • www.rmlucas.com • info@rmlucas.com

LUCAS

Coatings, Sealants and Adhesives

**REPAIR
ANY ROOF
ANY WEATHER
ANYWHERE**



DRY



WET



ANY SURFACE



Contractors across the country rely on the **LUCAS #6500 Universal Flashing Cement** to repair any type of roof under any weather conditions. Its' unique patented formula makes it an ideal repair solution no matter the circumstances. To learn more about this and other products visit rmlucas.com.

LUCAS... Done Right

ASPHALT REPAIR PRODUCTS AND CLEANERS



#19 ULTRA Rubberized Flashing Cement

Rubberized flashing cement for repairing leaks on shingles, BUR, SBS & APP modified bit, tile & masonry. Karnak #19 Ultra sticks to wet surfaces and can be applied under water. #19 Ultra is highly rubberized for lasting repairs. Use on horizontal & vertical surfaces

Product Code: #19-CTG-N | 19-1AF-N | 19-3AF-N | 19-5AF-N

Avail. Sizes: 10.1 oz. caulk tubes | 1-Gal | 3-Gal | 5-Gal | Winter & Summer



#155 Amphibikote Wet & Dry

Karnak #155 Amphibikote is carefully prepared, emergency roof cement with special water displacing characteristics which ensures an effective bond to both wet & dry surfaces. The ability to adhere during inclement weather makes Amphibikote the first choice of roofing contractors.

Product Code: #160.1-CTG | #155-1AF | #155-3AF | #155-5AF

Avail. Sizes: 10.1 oz. caulk tubes | 1-Gal | 3-Gal | 5-Gal | Winter & Summer



#799 Wash-N-Prep

Concentrated liquid TSP substitute to clean roofs before applying roof coatings. Wash-N-Prep is specially formulated to remove residue that can prevent adhesion of roof coatings. Use to clean BUR, metal, modified bit, TPO, PVC, Hypalon & existing roof coatings.

Product code: 799-CSE

Avail. Sizes: 1 quart bottles (6 per case)



#709 Karna-Klean

Karna Klean is a highly concentrated citrus base cleaner to dissolve and remove asphalt, tar, roof coating, and grease from a variety of surfaces including metal, concrete, clay, brick, and masonry. Karna Klean is great for cleaning all of your roofing tools & equipment.

Product Code: #709-CSE

Avail. Sizes: 1-liter bottles (12 per case)



#108 Asphalt Primer

Penetrating asphalt primer for use on gypsum, concrete, brick, metal, and asphalt surfaces. Excellent prime coat prior to application of modified bitumen sheets or asphalt cement repairs. Can also be used to coat rusted pipes and vents.

Product Code: 108-CSE | 108-5

Avail. Sizes: 14 oz. Spray Can (12/case) | 5-Gal

SPECIALTY ELASTOMERIC REPAIR PRODUCTS



#502MS Karna-Flex Seam Sealer

SEBS rubberized mastic for repairing seams; fasteners & flashings on Metal, EPDM, aged single ply, cementitious foam roofs. 502 Karna-Flex is solvent based, has superior elongation, skins fast, is sag resistant on verticals & has excellent low temp flexibility. Reinforce with Resat-Mat.

Product Code: #502MS-2 | **Available Colors:** White or Black

Avail. Sizes: 30 oz caulk tubes | 1-Gal | 3-Gal



#505MS Karna-Flex WB (Water-Based)

100% Acrylic low VOC mastic. Use on BUR, Mod-Bit, metal, concrete, spray foam & single ply repairs. Formulated with a unique viscosity to 3-course faster & easier on vertical and horizontal surfaces. Leave exposed to UV or coat with elastomeric roof coatings. Styrene Free!

Product Code: #505MS-2 | **Available Colors:** White or Desert Tan

Avail. Sizes: 3.5-Gal | 55-Gal Drum



#229AR Elastomeric

SBS rubberized waterproofing. Use on metal, asphalt, masonry & more. Available in brush & trowel grade; use trowel grade on horizontal & vertical surfaces including; fasteners, gutter liner, pitch pans, gravel stops, & more. Leave exposed to UV or coat with reflective coatings.

Product code: 229B (Brush) | 229T (Trowel) | **Available Color:** Black

Avail. Sizes: 30 oz caulk tubes | 1-Gal | 3-Gal | 5-Gal



#5540 Resat-Mat

Spun-laced polyester fabric for reinforcing coatings over irregular or rough surfaces. Use to reinforce seams or entire roof surfaces. Resat-Mat can be used with Karna-Flex, Karna-Flex WB, 229AR & any other Karnak elastomeric coating products.

Product Code: 5540H-04 | 5540H-06 | 5540H-40

Avail. Sizes: 4" x 300' | 6" x 300' | 40" x 340'



#550 Patch-N-Go Tapes

Self-sealing butyl tapes available in aluminum or fleece face. Aluminum-faced tapes are available in White, Black or Silver & are UV stable or can be coated. Fleece tape should be coated with Karna-Flex or Karna-Flex WB after application. Use a roof roller for maximum adhesion.

Product Code: 550W | 550B | 550S | 550F | 550DS

Avail. Sizes: Fleece & Silver: 4"x65.5' | White & Black 4", 6" 12" x 65.5'



ONTARIO ROOFING SUPPLY INC.

BAKOR ROOFING PRODUCTS

Premium quality primers, Plastic cement, Metal seam Sealer

Quick Dry Primer spray, Rubberized Plastic Cement Wet/Dry 810-47, Yellow Jacket fiberglass mesh, Polyester white fabric



DRY-SEK



ALL-PURPOSE DRYING GRANULES COLOR: Clear to white **TEXTURE:** Gelatinous mass

COVERAGE: Water surface around 10' x 10' x 1/2" = 600g of the product.

TECHNICAL SPECIFICATIONS Much faster than sawdust No need use to a pump Great time saver

COMPARATIVES RESTRICTIONS: Reaction time slightly slower in colder water.

APPLICATIONS: DRYSEK can be used on all types of roofing membranes and will not damage their components. Moreover, it can be made into a water barrier in order to repair targeted areas of the roof. It will not clog up drains. Easily picked up with a shovel or a broom



ONTARIO ROOFING SUPPLY INC.

MAGIC SAND / EMERGENCY LEAK STOPPER



TEMPORARY SOLUTION FOR URGENT ROOF REPAIRS
STOPS LEAKS INSTANTLY AND EFFICIENTLY

- **COLOUR:** whitish to greyish
- **ODOUR:** odourless
- **SIZE: 15 kg (33 lbs)**
- **PARTICULARITY:** Magical granules that dilate when in contact with water

USE: Apply ½" layer of MAGIC SAND on the area where the suspected leak might be. The surface must be wet. MAGIC SAND will dilate to temporarily seal the leak, even when it is raining. Permanent repairs should be made as soon as the weather allows it.

Lucas #550 EZ Seal

Lucas #550 is a fast and effective product for temporarily stopping leaks in all types of low-slope roofs. Manufactured from gel forming bentonite clay, #550 forms a watertight barrier when exposed to water. Ideal for stopping leaks during rainstorms, in ponding areas or in winter when there is snow on the roof. Formed into free-flowing micro-pellets, Lucas #550 pours easily from the spout on its' reusable waterproof plastic container. The small pellet size exposes a greater surface area resulting in a faster gel and water stopping seal.

APPLICATION Remove the cap from the lid of the pail and pull the spout to extend it fully prior to unscrewing the cap. To seal a leak, pour the #550 over the suspected leak area 1/2 to 1 inch thick. When using as a barrier, pour in a circle around the area to be repaired as needed to block the flow of water. Remove water from inside of the circle with a wetvac. Dry the surface and repair as necessary. #550 may also be used as a night seal. Pour onto the exposed edge of the roof to prevent moisture entry from heavy dew or unexpected rain. Sweep off and resume work when desired.





ONTARIO ROOFING SUPPLY INC.

KETTLE FRAGRANCE ODOR NEUTRALIZER

Removes Odors From:

- Hot Mix Asphalt Cement (Neat)
- Hot Mix Asphalt Cement with Anti-Strip and Other Additives
- Cutback Asphalt
- Asphalt Emulsions
- Fuel Oil
- Used Oil Fuels

Additives Without Negative Effects

The production of hot mix paving asphalt generates strong, long-lasting odors (from sulfides and hydrocarbons) that can be offensive to employees and neighbors. In response to demand for effective asphalt odor control, we developed a range additive that can be **mixed directly** into petroleum products used in the asphalt industry.

By adding a small amount of Ecosorb® additive to any phase of asphalt use or production — from manufacturing to storage to transportation to use — **odorous emissions are reduced and even eliminated**. We call this odor control by emission suppression. Before it's airborne, it's gone.

PRESENTATION: 10 KG JAR.





Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894.9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.



deScent®

Asphalt Odor Suppressant Additive

TECHNICAL DATA SHEET

REDUCES HYDROGEN SULFIDE AND OTHER VOC EMISSIONS BY UP TO 90%

deScent is an asphalt odor suppressant that neutralizes odorous volatile organic compounds (VOCs) including dangerous hydrogen sulfide (H₂S) gas emissions. It improves worker safety and air quality while eliminating odor complaints. deScent is a cost-effective odor suppressant, and it is easy to use and apply during asphalt storage or transfer. deScent alleviates pressure on asphalt manufacturing facilities by curtailing odor concerns of residents in nearby communities. For roofing contractors, it also eliminates the inconvenience of incurring additional costs to perform work during irregular hours or only seasonally due to public odor concerns.

APPLICATIONS

- Asphalt Roofing
- Asphalt Paving
- Asphalt Marine and Rail Transportation

USE DESCENT WHEN YOU NEED:

- To reduce H₂S risks and create a safer working environment
- To eliminate asphalt odor and public complaints
- A PPA-friendly alternative to zinc-based scavengers

FEATURES

ELIMINATES ASPHALT ODOR

Scientifically proven to suppress up to 90% of odor causing VOCs
Scientifically proven to reduce dangerous hydrogen sulfide (H₂S) gas emissions by up to 85%
Neutralizes odors rather than masking with another fragrance

DOES NOT IMPACT PERFORMANCE OF ASPHALTS

No effect on asphalt polymerization, penetration, softening point or dynamic shear rheometer (DSR) values

COMPATIBLE WITH POLYPHOSPHORIC ACID (PPA)

Unlike zinc-based H₂S scavengers, will not adversely react with PPA-modified asphalt

STABLE IN ASPHALT

Remains effective in asphalt for weeks to months, depending on storage conditions

EASY TO USE

No heat required

COMPATIBILITY

ASPHALT

Compatible with most roofing and paving grade asphalts including those modified with styrene-butadiene-styrene (SBS), styrene-butadiene rubber (SBR), ethylene-vinyl acetate (EVA) polymers, polyphosphoric acid (PPA), ground tire rubber (GTR) and recycled asphalt shingles (RAS)



Ontario Roofing Supply Inc.

Quality Products & Metal Accessories

647-894.9464

info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

DESCRIPTION & USE

Perlex Cant Strip is composed of a high density expanded Perlite, reinforcing cellulosic fibers and selected binders that provides an excellent transition from the deck to the wall of the roof. Cant Strips are used at the intersection of a roof deck with a higher wall or other vertical surface.



FEATURES & BENEFITS

Expanded Perlite – provides good dimensional stability, excellent insulation value, as well as greater fire resistance than conventional wood fiber materials

Reinforcing Cellulosic Fibers – provides a high recycled content

TECHNICAL DATA

Physical Properties and Characteristics

Test	ASTM	Cant Strip
Product Density, min	C 209	60 kg/m (10 pcf)
Compressive Strength 5% Consolidation, nom	C 165	241kPa (35 psi)
Flexural Strength, min	C 203	414 kPa (60 psi)
Laminar Tensile Strength, nom	C 209	76 kPa (11 psi)
(Installation) Linear Expansion, max	C 209	0.5%
(Moisture) Water Absorption, max	C 209	3.5%

Thermal Performance

Test	ASTM	Cant Strip
Flame Spread	E84	35
Smoke Developed	E84	10

Packaging & Dimensions

Sizes	1"x4"	1"x3"	1.5"x4"	1.5"x5"
Strips/Bundle	21	33	30	18
Bundles/Pallet	30	30	20	20
Ft Per Bundle	84	120	120	72
Lb/Bundle	20	20	30	30
Pallet Weight	600			
Pallets/Truck	48			

Perlite Cant Strip meets the requirements of ASTM C 728 2

LEED Recycled Content

Pre-consumer recycled content:	87%
Post-consumer recycled content:	11%

INSTALLATION/APPLICATION

Perlex Cant Strips may be adhered using hot asphalt, cold applied adhesive or urethane adhesive. Refer to the application guides and detail drawings for instructions.

ROOF HATCH 36" X 36"

DESCRIPTION & USE

- For roof openings 914 mm x 914 mm (3'0" x 3'0")
- Features a reliable hell coil design that provides years of service for safe and economical roof access
- Skylight version provides economical natural lighting to stair wells and small rooms
- Used for ladder access

FEATURES & BENEFITS (BETTER BY DESIGN)

- **Heavy Gauge Construction** - Built to withstand live loads up to 40 lbs (18 kg) per square foot.
- **Choice of Metal** - Hatches can be fabricated from galvanized steel (coated in a grey primer paint), mill finish utility grade aluminum, stainless steel or copper.
- **Easy to Install** - Pre-punched holes in the curb flange allow for quick fastening to the roof deck.
- **Superior Thermal Performance** - Fully insulated up to R-20 value. Suited for high efficiency buildings.
- **Hold Open Arms** - Door is locked in an open position to allow for safe egress and ingress.
- **Weathertight** - Doors are sealed with a durable neoprene gasket.
- **Kick Plate** - Replaces the exterior handle providing zero entry points for water.
- **Inside and Outside Latch Releases** - Internal latch includes a padlock hasp for locking. Outer padlock hasp is optional.

ROOF HATCH OPTIONS


- Safety Bar Handle
- Safety Rail System
- Wind Gust Control Unit
- Skylight Domes
- Vandal Grid
- Higher Curbs
- Stainless Steel Hardware
- Gas Spring

Note: For roof hatches larger than 3' x 3' or with 2 or more guided door supports, the option to factory install the hold open lock mechanism is available when the location of the stair access is known. If the stair access location is not known, a field kit can be purchased.




TECHNICAL DATA

Standard

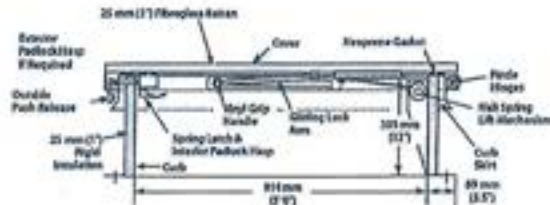

Metal	Curb	Door	Liner	Weight
G Galv. Steel	14 ga.	14 ga.	22 ga.	77 kg. (170 lbs)
A Aluminum	11 ga.	11 ga.	18 ga.	47 kg. (105 lbs)

R-20

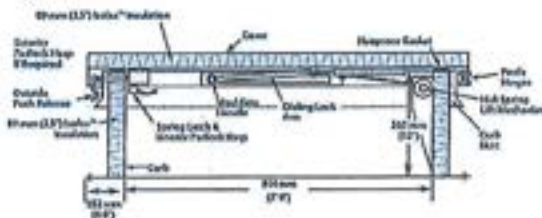

Metal	Curb	Door	Liner	Weight
G Galv. Steel	14 ga.	14 ga.	22 ga.	84 kg. (185 lbs)
A Aluminum	11 ga.	11 ga.	18 ga.	55 kg. (120 lbs)

WATER PUMPS

SEH-40H1.5" Centrifugal Water Pump, Honda GX150 Engine, 61 PSI, 73 GPM

SEH50X2" Centrifugal Water Pump, Honda GX120 Engine, 42.4 PSI, 158 GPM



SIMER-2300

Submersible Utility Pump, 1/4 HP Electric Motor, 1 1/4" NPT discharge, 1320 GPH, 8 ft. cord

HOSE KITS



HONDA ENGINES & PARTS

GX 160 / LADDER HOIST / WORKHORSES

GX270 / CUTTER MACHINES / KETTLES / TT1000 HOIST

GX340 / CUTTER MACHINES



Models vary in appearance. Image may not resemble actual engine.



Models vary in appearance. Image may not resemble actual engine.



Models vary in appearance. Image may not resemble actual engine.



SAFETY PRODUCTS

Pennant Multicolor flags



Safety Delineator Orange Pilon 42" H



ROOFERS KIT

- 3-point adjustable harness with mating buckles
- 1 back D-ring, and 2 tear away lanyard keepers
- Rope grab with 30" energy absorbing lanyard
- 50ft polyester vertical lifeline with snap hook
- Reusable roof anchor with screws
- Storage bucket and lid

Work Safe, Road Safe with our High Visibility Traffic Safety Products



ZENITH[®]

Safety Products



Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894-9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

SAFETY PRODUCTS

Caution and danger tapes 3" x 1000'



Safety Industrial Faceshield and Aluminum Bracket



INDUSTRIAL GLOVES: Cotton PVC Dots , 14" Kettle Gloves & Canvas work Gloves



ONATRIO ROOFING SUPPLY INC.

ZENITH[®] SAFETY EYEWEAR

Z1500 SERIES EYEWEAR

- Modern design with extended wraparound coverage
- Scratch-resistant polycarbonate lens with UV protection
- Ultra soft non-slip nosepiece
- White frame
- Distortion-free
- Compliant with CSA standard Z94.3



Z2400 SERIES EYEWEAR

- Frameless design with extended wraparound coverage
- Flexible temple provides added durability
- Scratch resistant polycarbonate lens with UV protection
- Distortion-free
- Compliant with CSA standard Z94.3 and ANSI Z87+



Model No.	Lens Tint	PROMO PRICE
SEC955	Clear	00.00
SEI524	Grey/Smoke	00.00
SEI525	Amber	00.00
SEI526	Blue	00.00
SEI527	I/O Blue Mirror	00.00
SEI528	Clear w/Anti-Fog	00.00

Model No.	Lens Tint	PROMO PRICE
SET315	Clear	00.00
SET316	Grey/Smoke	00.00
SET317	Amber	00.00
SET318	Blue	00.00
SET319	I/O Blue Mirror	00.00
SET320	Clear w/Anti-Fog	00.00

Z2000 SERIES EYEWEAR

- Sporty design with extended wraparound coverage
- Non-slip, extremely flexible temples provide superior comfort and fit
- Ultra soft non-slip nosepiece
- Scratch-resistant polycarbonate lens with UV protection
- Green frame
- Compliant with CSA standard Z94.3



GOGGLES W/SAFETY SHIELD

- Indirect ventilation and a polycarbonate shield for full face protection
- Face shield detaches from the goggles
- Curved face shield conforms to the shape of the users face for added protection
- Can be used over most prescription eyewear
- Compliant with CSA standard Z94.3



Model No.	Lens Tint	PROMO PRICE
SEK291	Clear	00.00
SDN697	Grey/Smoke	00.00
SDN698	Amber	00.00
SDN699	I/O Blue Mirror	00.00
SDN700	Clear w/Anti-Fog	00.00

Model No.	Lens Tint	PROMO PRICE
SEL095	Clear	00.00

Pricing in effect until Enter date or while quantities last. Taxes & freight extra. Due to current market fluctuations, prices may vary without prior notice.

ONTARIO ROOFING SUPPLY INC.

SHOCKWAVE™ 2 LANYARDS

- Tubular core style lanyards uniquely designed to expand and contract in reaction to a workers movements
- Stays out of your way when not in use, avoiding trips and snags
- Built in impact indicator provides visual evidence if the lanyard has been involved in a fall
- Length: 6'
- Certified to CSA standard Z259.11, Class E4



Model No.	Mfg. No.	No. of Legs	Harness Connection	Anchorage Connections	Promo Price
STANDARD LANYARDS					
SEB868	1244306C	One	Snap Hook	Snap Hook	00.00
NOMEX/KEVLAR ARC FLASH RATED LANYARDS					
SEP841	1244610C	One	Snap Hook	Snap Hook	00.00

DELTA™ HARNESES

- Patented no-tangle design allows harness to fall into place when donned
- Repel™ webbing reduces mold and dirt build up, abrasion resistance
- Revolver™ vertical torso locks into place, preventing slippage
- Lanyard keepers hold your unused snap hooks, reduces tripping
- Certified to CSA standard Z259.10



Model No.	MFG No.	Leg Connections	CSA Class	Promo Price
D-RINGS, BACK				
SEB391	1110600C	Quick-Connect	A	00.00
SEB406	1102000C	Tongue Buckle	A	00.00
SEB403	1103321C	Pass-Thru	A	00.00
D-RINGS, BACK & SIDE				
SEB401	1102008C	Tongue Buckle	A, P	00.00
D-RINGS, BACK & SHOULDER				
SEB392	1110602C	Quick-Connect	A, E	00.00
D-RINGS, BACK & FRONT				
SEP796	1102090C	Quick-Connect	A, D, L	00.00

NANO-LOK™ SELF-RETRACTING LIFELINES

- Extremely compact and lightweight at just 1.6 lbs.
- Integrated shock absorber
- Connectors install to webbing, leaving dorsal D-ring open for other equipment or rescue
- 420-lb. weight capacity
- Certified to CSA standard Z259.2.2, Type 1 SRL



SEE928



Model No.	MFG No.	Anchorage Connection	Promo Price
SINGLE LEG CONNECTOR			
SEE927	3101233	Steel Snap Hook	00.00
SEE928	3101258	Steel Swivel Snap Hook	00.00
SEE929	3101230	Aluminum Carabiner	00.00
TWIN LEG CONNECTOR			
SEE930	3101286	Steel Rebar Hooks	00.00
SEE931	3101283	Aluminum Rebar Hooks	00.00

SUSPENSION TRAUMA SAFETY STRAPS

- Allow a suspended worker to stand up in the harness while waiting for rescue
- Can be quickly attached to most harness brands in the field
- Sold per pair



Model No.	MFG No.	Promo Price
SEB436	9501403C	00.00 /Pair

Pricing in effect until Enter date or while quantities last. Taxes & freight extra. Due to current market fluctuations, prices may vary without prior notice.

ONTARIO ROOFING SUPPLY INC.

ZENITH®
Safety Products

TRAFFIC SAFETY

PREMIUM DELINEATOR POSTS

- Standard 42" high post with indentations for easier grip
- 100% LDPE construction offers maximum flexibility and durability
- Superior temperature resistance in hot and cold environments
- Fluorescent orange colour provides high visibility
- Two pre-applied 4" 3M™ high intensity reflective tape collars
- High density interlocking 16" x 16" base offers maximum stability and durability

PROMO PRICE

00.00

Model No.	Height*
SEC153	42



PREMIUM TRAFFIC CONES

- 100% PVC construction offers maximum flexibility and durability
- Superior temperature resistance in hot and cold environments
- Available with 6" and 4" 3M™ Hi-intensity collars
- High density interlocking base offers maximum stability



Model No.	Description	Colour	PROMO PRICE
SEB772	28" w/6" & 4" Collar**	Orange	00.00
SEB826	28" w/4" Collar*	Orange	00.00
SEB769	18"	Orange	00.00
SEB770	18" w/6" Collar**	Orange	00.00
SGC936	28" w/4" Collar	Yellow	00.00
SDS935	28" w/6" & 4" Collar	Lime Green	00.00
SDS934	18" w/6" Collar	Lime Green	00.00
SGD694	28" w/4" Collar	Blue	00.00

*Meets Minister of Transport regulations for Ontario and Alberta

**Meets Minister of Transport regulations for Quebec, Ontario and Alberta

SPEED BUMPS

- 1-piece lightweight 100% recycled rubber
- Resistant to corrosion, moisture, oil, weather variations and UV light
- Perfect for speed reduction in parking lots, school zones and areas with heavy pedestrian traffic
- Black with bright yellow reflective stripes for maximum daytime visibility
- Reflectors offer maximum night time visibility
- Easily installed with 14" rebar spike for permanent or temporary installation (sold separately)



Model No.	Length	Wt. lbs.	PROMO PRICE
SEH142	4'	35	00.00
SEH143	6'	55	00.00
REBAR SPIKE			
SEH144	14"		00.00

TRAFFIC CONES

- 100% PVC construction offers excellent flexibility and durability
- Temperature resistance in hot and cold environments
- Fluorescent orange color provides high visibility
- Available with 6" and 4" reflective collars
- High-density interlocking base offers maximum stability



Model No.	Height*	Description	Wt. lbs.	PROMO PRICE
SEF026	18	6" (QC, ON, AB)**	3.15	00.00
SEF027	28	4" (ON, AB)*	6.75	00.00
SEF028	28	6" & 4" (QC, ON, AB)**	6.75	00.00

*Meets Minister of Transport regulations for Ontario and Alberta

**Meets Minister of Transport regulations for Quebec, Ontario and Alberta


Pricing in effect until **Enter date** or while quantities last. Taxes & freight extra. Due to current market fluctuations, prices may vary without prior notice.

TALL BOY DRILL AND SETTER TOOL



The combination of a durable canvas fastener bag and a lightweight, adjustable magnetic setter tool allows a roofer to quickly and accurately place fasteners in the desired fastening pattern without bending over. The setter tool will install fasteners into most roofing materials, including gypsum cover boards. The lightweight and easy to maneuver TRUFAST 0-2500 rpm Stand-Up Power Tool allows the operator to quickly and comfortably drive the fasteners to the proper depth without special training.

Shaft & Bit Assembly (OMG #TB3-24KIT) (TB3-24, TB9, TB17, SPD11, C-Clip, Washer)

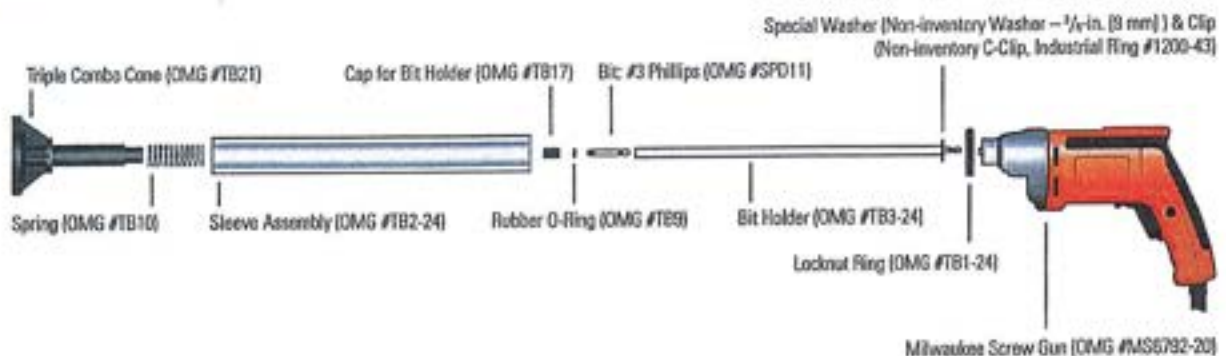

ONTARIO ROOFING SUPPLY INC.



HYDRAULIC PALLET TRUCKS

- Heavy-duty polyurethane tread bonded to cast iron core steering wheels and rollers provide superior performance
 - Heavy-duty plastic rollers facilitate entry and exit of pallets
 - 6 1/4" (158.75 mm) wide forks
- Lowered pallet truck height: 3 1/4"
- Raised pallet truck height: 7 3/4"
 - Capacity: 5500 lbs.
 - 1-year limited warranty

KLETON

URETHANE WHEEL CHOCK

- Safety orange for greater visibility
- Molded-in hole through width of chock for attaching security chain (chain sold separately)
- O.A. dimensions: 11" L x 8" W x 8" H



KLETON

Model No.	Promo Price
KH897	0.00

Model No.	O.A. Fork Dim. L" x W"	Promo Price
ML966	36 x 20 1/2	0.00
ML967	42 x 20 1/2	0.00
ML968	48 x 20 1/2	0.00
ML969	36 x 27	0.00
ML970	42 x 27	0.00
ML971	48 x 27	0.00
ML972*	48 x 27	0.00

* All-nylon core steering wheels and rollers.

FLAT FREE WHEEL HAND TRUCKS

- Constructed of 1" 16-gauge steel tube
- Nose plate 8-gauge steel
- Overall width: 22"
- Wheel dimensions: 10" x 3 1/2"
- Powder coated

600-LB. CAPACITY



MN389



MN390



MN391

KLETON

Model No.	Description	Nose Plate Dim. Height"	W" x D"	Wt. lbs.	Promo Price
MN389	Dual Handle	46	14 x 10	20	0.00
MN390	Continuous Handle	48	14 x 10	22	0.00
MN391	P-Handle	51	14 x 9	22	0.00

SHOP DESKS

- Durable carbon steel construction
- 4-compartment organizer and slightly sloped writing surface
- Drawer dim.: 24" W x 28" D x 3 1/2" H
- Grey enamel finish



FI518



FI519

KLETON

Model No.	Style	O.A. Dimensions W" x D" x H"	Promo Price
FI518	Wall-Mounted	34 1/2 x 30 x 19	0.00
FI519	Open-Floor	34 1/2 x 30 x 53	0.00
FI520	Cabinet	34 1/2 x 30 x 53	0.00

Pricing in effect until Enter date or while quantities last. Taxes & freight extra. Due to current market fluctuations, prices may vary without prior notice.

ONTARIO ROOFING SUPPLY INC.

SHIPPING & PACKAGING ESSENTIALS SALE!

TAPE DISPENSERS

- Industrial quality tape gun constructed of steel and high impact plastic frame
- Retractable safety blade protects operator from injury
- Adjustable brake lets you choose the desired release tension



PE323

KLETON

Model No.	Width"	PROMO PRICE
PE322	2	00.00
PE323	3	00.00

INDUSTRIAL UTILITY KNIFE

- Auto-lock blade, attached blade snapper



Model No.	PROMO PRICE
PE814	00.00

aurora tools



BOX SEALING TAPE

- Quality acrylic adhesive tape provides consistent performance
- Designed to resist center seam splitting
- Fits on most industrial tape guns
- Elongation at break: 130%
- Clear

KLETON

Model No.	Dimensions	Thickness Microns Mils	Rolls /Case	PROMO PRICE
PF231	2" x 216' (48 mm x 66 m)	40 1.6	36	00.00 /Ea.
PF232	2" x 328' (48 mm x 100 m)	40 1.6	36	00.00 /Ea.
PF234	3" x 216' (72 mm x 66 m)	40 1.6	24	00.00 /Ea.

IMPULSE HEAT SEALERS

- Compact, lightweight design
- Easy to operate
- Used for sealing polyethylene, polypropylene, and PVC bags
- 110 V



















KLETON

Model No.	Size"	PROMO PRICE
PF464	8	00.00
PF465	12	00.00

Pricing in effect until Enter date or while quantities last. Taxes & freight extra. Due to current market fluctuations, prices may vary without prior notice.

FASTENERS	APPLICATIONS	THREADS PER INCH/STYLE	HEAD STYLE	USE WITH	STANDARD LENGTHS	MATERIAL/ FINISH	CODE APPROVALS
#12 DP ROOFING FASTENERS 	STEEL (16 GAUGE OR THINNER)	13 SINGLE LEAD	#3 PHILLIPS FLAT TRUSS HEAD	METAL PLATE	1-5/8", 2-1/4", 2-7/8", 3-1/4", 3-3/4", 4-1/2", 5", 6", 7", 8"	CARBON STEEL BLACK E-Coat	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1
#12 DPH ROOFING FASTENERS 	STEEL (16 GAUGE OR THINNER)	13 SINGLE LEAD	1/4" HEX HEAD	METAL PLATE	1-5/8", 2-1/4", 2-7/8", 3-1/4", 3-3/4", 4-1/2", 5", 6", 7", 8"	CARBON STEEL BLACK E-Coat	FM, MIAMI-DADE State of Florida - FLR: 4500-R1
#14 HD ROOFING FASTENERS 	STEEL (16 - 24 GAUGE), WOOD, OR CONCRETE	13 SINGLE LEAD	#3 PHILLIPS FLAT TRUSS HEAD	METAL PLATE BATTEN BAR	1-1/2", 2", 2-1/2", 3", 3-1/2", 4", 4-1/2", 5", 5-1/2", 6", 7", 8", 9", 10", 11", 12"	CARBON STEEL BLACK E-Coat	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1
#14 STAINLESS STEEL HD ROOFING FASTENERS 	STEEL (18 GAUGE OR THINNER) OR WOOD	13 SINGLE LEAD	#3 PHILLIPS FLAT TRUSS HEAD	METAL PLATE BATTEN BAR	1-1/2", 2", 3", 4", 5", 6", 7", 8", 9", 10", 12"	TRIMRITE® STAINLESS STEEL UNS 542010	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1
#15 EHD ROOFING FASTENERS 	STEEL (18 GAUGE OR THINNER) OR WOOD	13 SINGLE LEAD BUTTRESS	#3 PHILLIPS FLAT TRUSS HEAD	METAL PLATE BATTEN BAR	1-1/4", 2", 3", 4", 5", 6", 7", 8", 9", 10", 11", 12", 14", 16", 18", 20", 22", 24"	CARBON STEEL BLACK E-Coat	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1
(PA) PRE-ASSEMBLED 	STEEL (16 GAUGE OR THINNER) OR WOOD	13 SINGLE LEAD	1/4" HEX OR #3 PHILLIPS FLAT TRUSS HEAD	METAL PLATE	1-5/8", 2-1/4", 2-7/8", 3-1/4", 3-3/4", 4-1/2", 5", 6", 7", 8"	SCREW-CARBON STEEL & BLACK E-Coat; PLATE- GALVALUME	FM State of Florida - FLR: 4500-R1 MIAMI-DADE (DP Only)
1/4" CONCRETE SPIKE ROOFING FASTENER 	CONCRETE	N/A	TRUSS HEAD	METAL PLATE BATTEN BAR	1-1/4", 1-1/2", 2", 2-1/2", 3", 3-1/2", 4", 4-1/2", 5-1/2", 6", 6-1/2", 7", 7-1/2", 8", 9", 10", 11", 12", 13", 14", 15", 16"	CARBON STEEL BLACK E-Coat	FM
FLUTED CONCRETE NAIL 	CONCRETE, MASONRY BLOCK & BRICK	N/A	FLAT TRUSS HEAD	METAL PLATE BATTEN BAR	1-1/2", 2", 2-1/2", 3", 3-1/2", 4", 4-1/2", 5", 5-1/2", 6", 7", 8", 9", 10", 11", 12"	CARBON STEEL BLACK E-Coat	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1
TL ROOFING FASTENERS 	TECTUM® & L.E. WT. CONCRETE	TAPERED ROOF WITH BUTTRESS	1/4" SQUARE DRIVE FLAT HEAD	METAL PLATE	2", 2-1/2", 3", 3-1/2", 4", 4-1/2", 5", 5-1/2", 6", 6-1/2", 7", 7-1/2", 8", 8-1/2", 9", 9-1/2", 10", 11", 12", 13", 14"	NYLON	FM MIAMI-DADE State of Florida - FLR: 4500-R1
#12 PURLIN ROOFING FASTENERS 	STEEL (3/16" THICK OR THINNER)	24 SINGLE LEAD	#3 SQUARE DRIVE PANCAKE HEAD	METAL PLATE BATTEN BAR	1-3/8", 2-3/4", 3-3/4", 4-3/4", 5-3/4", 6-3/4", 7-3/4", 8-3/4"	CARBON STEEL BLACK E-Coat	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1
SIP LD FASTENER 	CORRUGATED STEEL, WOOD & CONCRETE	10 SINGLE LEAD	T-STAR #30 PANCAKE HEAD	N/A	3", 3-1/2", 4", 4-1/4", 5", 5-1/2", 6", 6-1/2", 7", 7-1/2", 8", 8-1/2", 9", 10", 11", 12", 13", 14", 15", 16", 17", 18"	CARBON STEEL BLACK E-Coat	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1
SIP HD FASTENER 	STRUCTURAL STEEL	20 SINGLE LEAD	T-STAR #30 PANCAKE HEAD	N/A	6", 8", 9-3/4", 11-3/4", 13-3/4"	CARBON STEEL BLACK E-Coat	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1
SIP TP FASTENER 	WOOD	7 SINGLE LEAD	T-STAR #30 PANCAKE HEAD	N/A	2", 2-1/2", 3", 3-1/2", 4", 4-1/2", 5", 5-1/2", 6", 6-1/2", 7", 7-1/2", 8", 8-1/2", 9", 10", 11", 12", 13", 14", 15", 16", 17", 18"	CARBON STEEL BLACK E-Coat	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1

BASE SHEET FASTENER	APPLICATIONS	STANDARD LENGTHS	HEAD/DISK DIAMETER	MATERIAL / FINISH	CODE APPROVALS
TWIN LOC-NAIL 	LWC, TECTUM® & GYPSUM	1.4", 1.8", 2.0", 3.0", 4.0"	2.7"	GALVALUME® - PLATE, COATED STEEL - TUBE STAINLESS STEEL - LOCKING STAPLE	FM MIAMI-DADE
FM-90 	LWC & GYPSUM	1.7"	2.7"	GALVALUME® - PLATE POLYMER COATED STEEL - LEGS	FM MIAMI-DADE
FM-75 	LWC, IWS CONCRETE & GYPSUM	1.7"	2.7"	GALVALUME® - PLATE POLYMER COATED STEEL - LEGS	FM MIAMI-DADE
FM-290 	LWC	1.7"	3.6" X 2.5"	GALVALUME® - PLATE POLYMER COATED STEEL - LEGS	FM MIAMI-DADE
DO ALL LOC-NAIL 	GYPSUM BOARD (USE WITH METAL CAP FOR BASE SHEET ATTACHMENT)	1.375", 1.75"	.435" HEAD	ZINC PLATED OR STAINLESS STEEL	N/A

PLATES	APPLICATIONS	USE WITH	CODE APPROVALS	BAR	FEATURE	THICKNESS	MATERIAL	CODE APPROVALS
3" METAL INSULATION PLATE 	COVERBOARDS, INSULATION, & BUR BASE SHEETS TO THE SUBSTRATE	DR, HD, HD-SS, EHD, TG, TS250	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1	TB-50 TERMINATION 	SEALANT LEDGE	.050"	EXTRUDED ALUMINUM	N/A
3" RECESSED METAL INSULATION PLATE 	INSULATION TO THE SUBSTRATE	DR, DPH, HD, HD-SS, EHD, TS250	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1	TB-75 TERMINATION 	SEALANT LEDGE	.075"	EXTRUDED ALUMINUM	N/A
3" TL INSULATION PLATE 	COVERBOARDS, INSULATION, BUR BASE SHEETS TO CEMENTITIOUS WOOD FIBER, GYPSUM, & LIGHTWEIGHT CONCRETE SUBSTRATE	TL	FM MIAMI-DADE State of Florida - FLR: 4500-R1	TB-75-SS TERMINATION 	SEALANT LEDGE	.075"	STAINLESS STEEL	N/A
2" METAL SEAM PLATE 	REINFORCED & NON-REINFORCED SINGLE-PLY MEMBRANES TO THE SUBSTRATE	HD, HD-SS, EHD, PE, TG, TS250	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1	TB-90 TERMINATION 	FLAT	.090"	EXTRUDED ALUMINUM	N/A
2" BARBED SEAM PLATE 	REINFORCED SINGLE-PLY & MODIFIED BITUMINOUS MEMBRANES TO THE SUBSTRATE	HD, HD-SS, EHD, PE, TG, TS250	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1	TB-100 TERMINATION 	SEALANT LEDGE	.100"	EXTRUDED ALUMINUM	N/A
2" TL SEAM PLATE 	REINFORCED SINGLE-PLY & MODIFIED BITUMINOUS MEMBRANES TO CEMENTITIOUS WOOD FIBER, GYPSUM, & LIGHTWEIGHT CONCRETE SUBSTRATE	TL	FM MIAMI-DADE State of Florida - FLR: 4500-R1	TB-125 TERMINATION 	FLAT	.125"	EXTRUDED ALUMINUM OR STAINLESS STEEL	N/A
2.4" BARBED METAL SEAM PLATE 	REINFORCED SINGLE-PLY & MODIFIED BITUMINOUS MEMBRANES TO THE SUBSTRATE	HD, HD-SS, EHD, PE, TG, TS250	FM, MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1	TB-125-SS TERMINATION 	FLAT	.125"	STAINLESS STEEL	N/A
2.4" BARBED METAL SEAM PLATE (14 BARB) 	REINFORCED SINGLE-PLY & MODIFIED BITUMINOUS MEMBRANES TO THE SUBSTRATE	HD, HD-SS, EHD, PE, TG, TS250	FM, MIAMI-DADE State of Florida - FLR: 4500-R1	ND-100 DRAIN 	STONE BALLAST RETAINER	.100"	EXTRUDED ALUMINUM	N/A
2.4" SCOOP SEAM PLATE 	REINFORCED SINGLE-PLY & MODIFIED BITUMINOUS MEMBRANES TO THE SUBSTRATE	HD, HD-SS, EHD, PE, TG, TS250	FM, MIAMI-DADE State of Florida - FLR: 4500-R1	BATTEN BAR 	FLAT OR RECESSED	.043"	GALVALUME®	FM MIAMI-DADE CE - ETA 09/0375 State of Florida - FLR: 4500-R1
				TWIN LOC COILED BATTEN BAR 	TWIN LOC-NAIL BATTEN FASTENER	.040"	GALVALUME®	MIAMI-DADE

TRUFast Shorty Tool™



- Allows one-hand operation to drive fasteners on flat or sloping surfaces.
- For use with #3 Phillips head and Hex head fasteners.
- Easy depth control adjustment helps ensure proper fastener tightness.
- Compact and lightweight.
- For use on Milwaukee 6792-20 Screwgun with threaded nosepiece.

TRUFast PA System™



- PA (pre-assembled) fasteners are faster to install than individual screws and plates.
- System and tools require no special training.
- Improves ergonomics and worker productivity.
- Simple, lightweight, and portable Standup Tool.
- Reliable and economical as compared with cumbersome, complicated automated equipment.

DISTRIBUTED BY:



ALLENLOH, BRINCK & CO. - Group

- Safely heats cylinder to an optimal 90 degrees F/32 degrees C (+ - 10 degrees F/5 degrees C)
- Saves money by optimizing gas and material usage
- Also works on 30 and 40 Pound Gas Cylinder Tanks
- Eliminate unnecessary cylinder refills in cold weather
- Certified to UL/CSA/CE standards

Powerblanket PBL20 Gas Cylinder Heater (Propane)



Powerblanket PBL100 Gas Cylinder Heating Blanket (Propane)

powerblanket life GAS CYLINDER HEATERS

- Protect your materials without overheating or burning
- Fast and easy to install
- Increase flow rate performance and efficiency of gas cylinders
- Eliminate unnecessary cylinder refills in cold weather
- Proudly made in the USA
- Certified by ETL to UL/CSA/CE standards

FEATHERLITE

INDUSTRIAL LADDERS



ALUMINUM EXTENSION

EXTRA HEAVY DUTY
300
LB
TYPE 1A



Box Section Design



Side Mounted Pulley



D Rung



MODEL	LADDER SIZE	MAX. OPEN LENGTH	BASE SECTION		FLY SECTION		APPROX. WEIGHT LBS	MAX. REACH
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH		
4216D	16'	13'	16 1/4"	15 1/4"	14 1/2"	12 1/2"	32	15' 11"
4220D	20'	17'	16 1/4"	15 1/4"	14 1/2"	12 1/2"	37	19' 10"
4224D	24'	21'	16 1/4"	15 1/4"	14 1/2"	12 1/2"	44	23' 8"
4228D	28'	25'	16 1/4"	15 1/4"	14 1/2"	12 1/2"	52	27' 7"
4232D	32'	29'	18 1/4"	16 1/4"	15 1/2"	13 1/4"	64	31' 5"
4236D	36'	32'	18 1/4"	16 1/4"	15 1/2"	13 1/4"	70	34' 4"
4240D	40'	35'	18 1/4"	16 1/4"	15 1/2"	13 1/4"	82	37' 4"
4244D	44'	39'	18 1/4"	16 1/4"	15 1/2"	13 1/4"	90	40' 2"

EXTRA HEAVY DUTY
300
LB
TYPE 1A



D Rung



Max Lock



Swivel Safety Shoe



MODEL	LADDER SIZE	MAX. OPEN LENGTH	BASE SECTION		FLY SECTION		APPROX. WEIGHT LBS	MAX. REACH
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH		
3216D	16'	13'	17 1/4"	15 1/4"	15 1/2"	13 1/2"	29	15' 11"
3220D	20'	17'	17 1/4"	15 1/4"	15 1/2"	13 1/2"	35	19' 10"
3224D	24'	21'	17 1/4"	15 1/4"	15 1/2"	13 1/2"	41	23' 8"
3228D	28'	25'	18 1/4"	15 1/4"	15 1/2"	13 1/4"	53	27' 7"
3232D	32'	29'	18 1/4"	15 1/4"	15 1/2"	13 1/4"	60	31' 5"
3236D	36'	32'	18 1/4"	15 1/4"	15 1/2"	13 1/4"	74	34' 4"
3240D	40'	35'	18 1/4"	15 1/4"	15 1/2"	13 1/4"	82	37' 4"

MAX LOCK™

THE
**STRONGEST,
TOUGHEST,
LIGHTEST
RUNG LOCK
EVER.**

MEDIUM DUTY
225
LB
TYPE 2



Aluminum Pulley



MaxLock™



Slip Resistant Shoe



MODEL	LADDER SIZE	MAX. OPEN LENGTH	BASE SECTION		FLY SECTION		APPROX. WEIGHT LBS	MAX. REACH
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH		
2216	16'	13'	18 1/4"	14 1/4"	15 1/4"	13 1/4"	21	15' 11"
2220	20'	17'	16 1/4"	14 1/4"	15 1/4"	13 1/4"	27	19' 10"
2224	24'	21'	16 1/4"	14 1/4"	15 1/4"	13 1/4"	33	23' 8"
2228	28'	25'	16 1/4"	14 1/4"	15 1/4"	13 1/4"	41	27' 7"
2232	32'	29'	17 1/4"	15 1/4"	16 1/4"	14 1/4"	48	31' 5"
2236	36'	32'	17 1/4"	15 1/4"	16 1/4"	14 1/4"	68	34' 4"
2240	40'	35'	17 1/4"	15 1/4"	16 1/4"	14 1/4"	78	37' 4"






Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894-9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

SAFETY POST

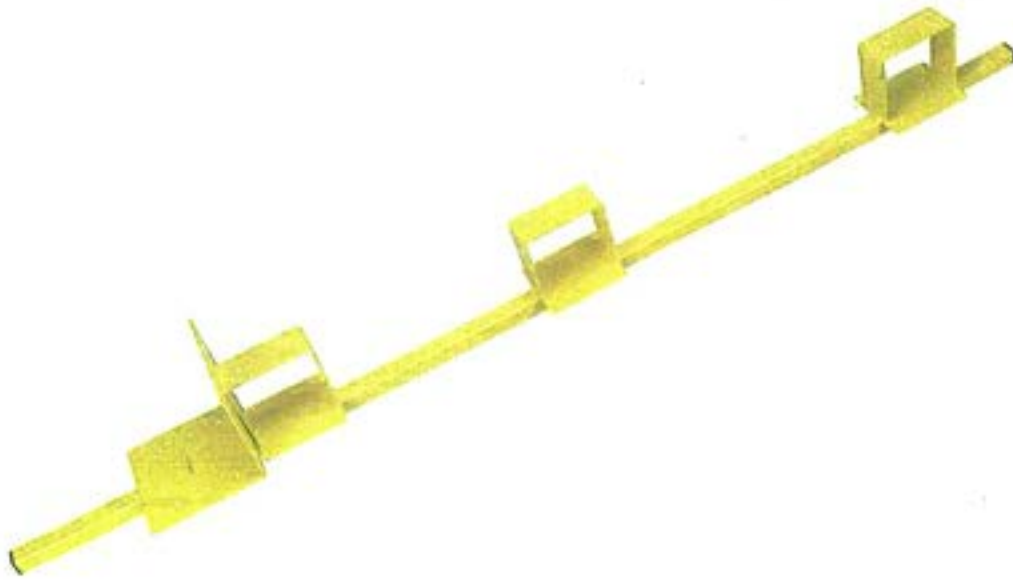

FEATURES & SPECS

FEATURES

- Oven-Baked Paint For Long-Lasting Surface Protection
- Complies With Relevant OSHA Standards And Guidelines
- Steel Rails Installed At 8' Intervals, Saving Time And Reducing The Number Of Posts Required
- Combination Of Wood Studs And Steel Rails Allows More Complex Installations
- Can Be Installed By Screwing Directly Into Roof Facing Without Using Clamps

SPECIFICATIONS

- LENGTH 56.00"
- WIDTH 6.00"
- HEIGHT 7.00"
- WEIGHT 13.40 LBS



Ontario Roofing Supply Inc.

Quality Products & Metal Accessories

647-894.9464

Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

PENETRATOR 2+2 MOBILE FALL PROTECTION



Penetrator 2+2
Part ID: 60050

Penetrator 2+2 mobile fall protection system offers both unparalleled portability and compact design. Ships job site ready on a standard pallet, handles are retractable and pin into place. Optional cover available for rooftop storage when not in use.

Remove cover for fall protection compliance at a moment's notice for any workers requiring roof top access. The Penetrator 2+2 provides fall protection for 2 fall arrest and 2 fall restraint or a total of 4 workers. When a fall occurs, the powerful penetrating spikes engage, piercing through roof membrane, insulation as well as metal decking, thus creating a safe, secure fall arrest anchor. For use on most substrates, EXCLUDING concrete, the Penetrator has been tested for use on Built-Up, TPO, ISO, PVC, EPDM, and other standard materials that are part of a finished roof system. The Penetrator 2+2 is reusable, gross weight of Penetrator 2+2 with ballasts is 420 lbs.

The Penetrator is compliant with OSHA Fall Protection Regulation 1926.502. New OSHA Rule in affect: Walking-Working Surfaces, #1910.28, please comply with this as well as all Local, State and Federal OSHA rules.

Design Improvements

- Larger Fall Arrest Rings with Side By Side Design
- Large Hoisting Rings Build In
- Large Printed Instruction Plate
- NEW 45 Degree Safe Working Zone Indicator Guide
- Wider Single Axle Wheel Base
- Security Cable Included



45-degree Safe Working Area Indicator conveys proper clearance space.



Wider Single Axle Wheel Base Increases the frames footprint while allowing a larger pivot point. Along with flat free tires makes the Penetrator 2 + 2 the most mobile cart available



2+2 Instruction Manual



See reverse side for additional specifications

EN601 Rev. 11/14/09

95 YEARS OF TRUSTED PERFORMANCE

LITTLE WONDER®

Optimax Blowers

More Air Power. Less Man Power.

Strong, ergonomic adjustable handle with anti-vibration grip for added comfort.



Powerful 7- or 9-blade fan and steel impeller produces high airflow while the scrolled housing allows uninterrupted air intake. Even if a portion of the housing is covered with leaves and debris, airflow can still enter the impeller area and be forced out the discharge chute.

Durable, heavy gauge all-steel housing for strength and durability. Large discharge for optimum air flow.


Curved aerodynamic inlet draws air in smoothly for constant power and helps avoid clogging even if leaves are sucked in.

Convenient lift handle makes lifting the blower on and off the truck easier.



Optional swivel wheel kit for easy maneuverability.

Optimax™ Self-Propelled Blower

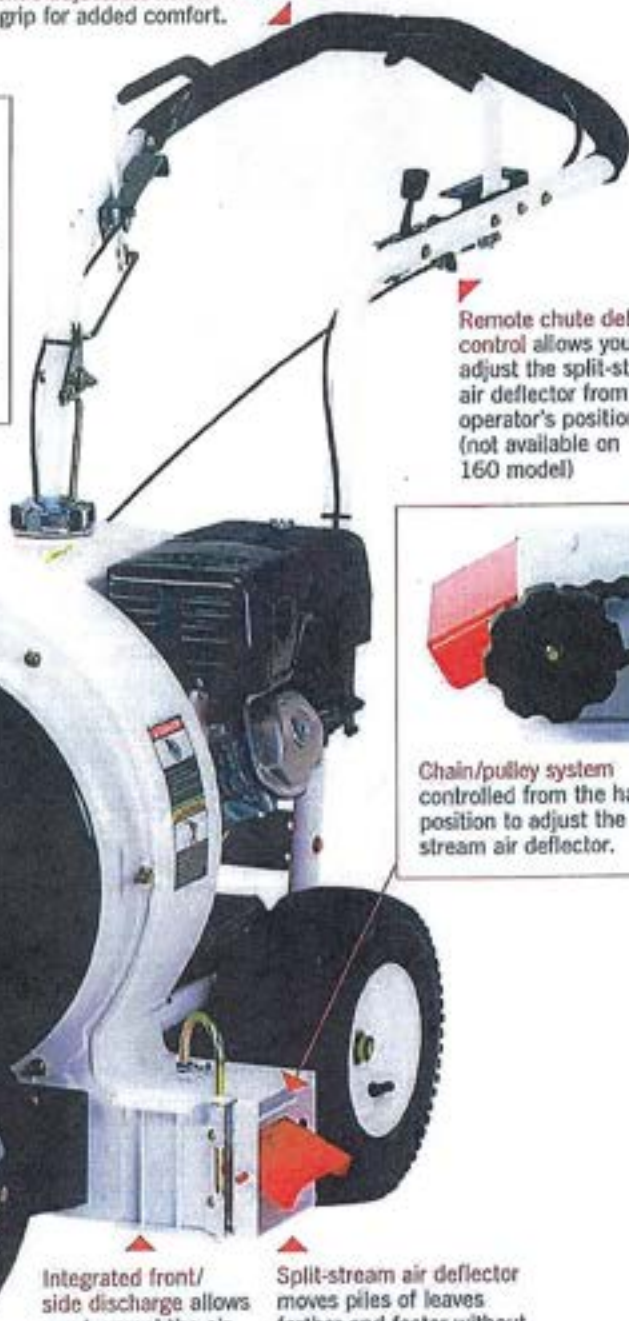

Remote chute deflector control allows you to adjust the split-stream air deflector from the operator's position. (not available on 160 model)



Chain/pulley system controlled from the handle position to adjust the split-stream air deflector.

Integrated front/side discharge allows you to expel the air from the front of the unit or out the side without tools.

Split-stream air deflector moves piles of leaves farther and faster without blow-back. You'll only have to go over the area once.

5-YEAR WARRANTY

Engines are warranted separately by manufacturer.



Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894.9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

RED DRAGON HOT AIR BLOWER

The NEW Red Dragon® RD 6009 Roof Dryers defrost, dry, and get you back on the job with minimum effort. Their rugged design and user-friendly features make them the perfect choice for professional roofing contractors. Use them to dry surfaces after ponding water has been removed or to remove morning dew, frost, or light debris. The Roof Dryers work by combining high heat (up to 350° F) and a 200 mph airstream to facilitate quick drying and reduce costly downtime. There are no electrical cords or danger of electrical shock.

Model	9270-06-01
Engine	KOHLER Command PRO® CH395
Displacement	277cc
Fuel Capacity	1.85 Gal.
Air Cleaner type	Quad-Clean™
Low Oil Sensor	Standard
Impeller (diameter, type)	17", 7 blade steel, reverse angle
Impeller depth	2.75"
Discharge Chute Area	25.8 sq *
Air Volume	2260 cfm
Air Speed	143 mph
Integrated Front Discharge	Yes
Throttle Control	Remote
Air Flow Control	Remote
Dimensions (Height, Width, Length)	43" x 28" x 58"





ONTARIO ROOFING SUPPLY INC.

HENNES JOHNSON EQUIP. COLD APPLY PROCESS



Hennes-Johnson - 4520 Cold Process

The **Model 4520 Cold Process** sprayer from Hennes-Johnson represents the roofing industry standard for the airless application of modified bitumen adhesives, straight cut-back asphalts, asphalt emulsions, and water and solvent based elastomeric coatings. Rated **4500 psi** at **5 gpm** and powered by **Honda's 630 cc (20hp)** engine, the 4520 stands ready to conquer the challenges of your toughest spray application needs.

Viscount II Hydraulic Motor

- > Reciprocating anti-stall design
- > Proven and reliable component life

Direct Immersion Lift Tower

- > Maximizes draw potential.
- > Hydraulic powered
- > Positive lock

Xtreme Pump

- > 4500 psi @ 5gpm
- > Field serviceable with minimum tool requirements

Dashboard Controls

- > Operator friendly
- > Fluid pressure gauge



Honda 630cc Engine

- > Electric Start
- > Low oil engine shut-down
- > Six gallon fuel cell

Auxiliary Hydraulic Pressure Port


- > Power hydraulic hose reels, mixers, and transfer pumps.
- > Quick connect couplings.






**ALL SEASONS
EQUIPMENT**

ANY BRAND EQUIPMENT

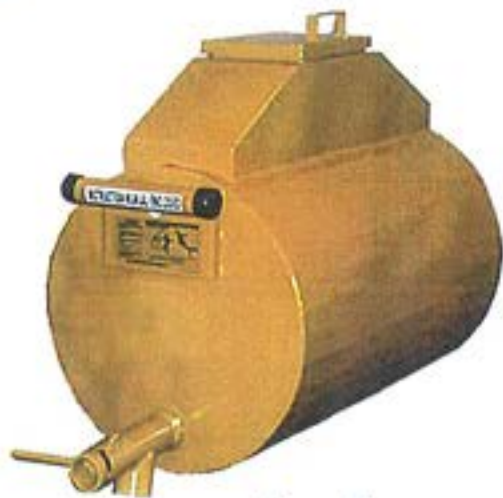



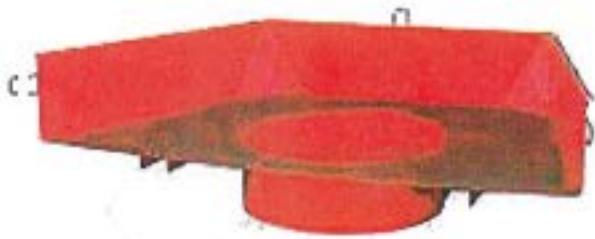



SINCE 1952

ROOFMASTER
PRODUCTS COMPANY

®

CARLISLE



ANY TIRES FOR EQUIP.





Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894.9464
Info@ontarioroofingsupplyinc.ca

ONTARIO ROOFING SUPPLY INC.

TranzSporter TP250


TP250 Collapsible Carriage 250 lb. Capacity, 28 ft. Platform Hoist



Ideal for moving shingles, felt, insulation, etc. to those hard to reach locations. This hoist features a 25% increase in lifting capacity over previous models, up to 250 lbs. The new collapsible carriage comes with cam followers for better tracking and handling. Carriage also features an aluminum deck and flap for lighter weight and longer life. A rolled goods/plywood bracket comes with unit and pins into carriage.

TP250/TP400 Base Track Features:

- The 4 ft. heavy-duty aluminum base track utilizes laser cut steel tube support plates for job site toughness
- Amber colored carriage bumpers to protect against damage and wear from repeated lowering
- Oversized cotter pins for fast and simple removal of quick change cable drum and belt replacement
- Large cast aluminum feet for added stability
- Dual band brake system for smoother stops

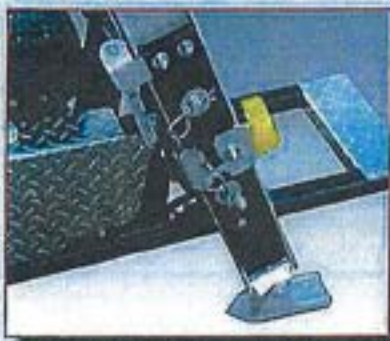

Quick Access for Belt Replacement

Oversized cotter pins for fast and simple removal of quick change cable drum and belt replacement.



TP 250 Platform Lift Hoist - 250 lbs. Capacity

- | | |
|-------------|------------------------------------|
| Part #60040 | 28 ft. Hoist with Lifan Gas Engine |
| Part #60041 | 28 ft. Hoist with Honda Gas Engine |
| Part #60042 | 28 ft. Hoist with Electric Motor |

Additional Track Sections

- | | |
|-------------|----------------------------------|
| Part #10092 | 4 ft. TranzSporter Track Section |
| Part #10091 | 8 ft. TranzSporter Track Section |

HS2000 Bi-Directional & HS1000

Ruggedly constructed RGC Swing Hoists are ideal for handling heavy, bulky loads. Offered as HS1000 (1/2 ton) and HS2000 Bi-Directional (1 ton) models, these hoists are easily transported and assembled. Self-locking pins and basic hand tools are used to quickly build a strong, safe, reliable hoist.

RGC Swing Hoists are powered by either a gas or electric HydraPak. The power up and power down feature puts the operator in complete control. A separate winch and power unit make the hoists extremely easy to handle.

An optional handwinch is also available to raise the HydraPak to the roof with minimal effort. It quickly mounts to the hoist frame and can lift a HydraPak up over 10 stories.

Swing Hoist Features & Benefits

- ▶ The HS2000 Bi-Directional hoist can be set up to swing to the left or to the right.
- ▶ High-strength steel tubing is used to build these strong reliable hoists.
- ▶ An exceptional boom design ensures greater strength.
- ▶ The cable keeper provides added lifting stability.
- ▶ The hydraulic power up and power down feature puts the operator in complete control.
- ▶ Separate winch and power units make the hoist extremely easy to handle.
- ▶ A split leg frame design makes transporting the hoist easy.
- ▶ Self-locking pins permit quick and easy frame assembly.
- ▶ The winch is also mounted to the hoist frame with pins.
- ▶ The swing boom unloads materials well back of the roof edge for greater operator safety.
- ▶ Nesting ballast weight shells are included for additional safety.
- ▶ The self-locking hydraulic boom makes loading and unloading materials safe and fast.
- ▶ An optional handwinch quickly mounts to the hoist frame to raise the HydraPak up 10+ stories.
- ▶ An optional HydraWinch HD is available with 730 ft. of wire rope for the HS2000.
- ▶ An optional Upper Limit Switch for anti-two blocking is also available for the HS2000.

HS2000 Swing Hoist with 1600 lb. Gravel Bucket



HS1000 Swing Hoist with 400 lb. Trash Tray



Specifications

Hoist Model Specs	HS1000	HS2000	HS300
Capacity	1000 lbs.	2000 lbs.	300 lbs.
Standard Winch	HW1000S	HW2000S	---
Cable: Supplied	150 / 300 ft.	200 / 300 ft.	---
Hoist Speed (standard winch)	140 fpm	160 / 80 fpm	---
Optional Winch	Call Factory	HydraWinch HD	---
Cable: Supplied	---	730 ft.	---
Hoist Speed (HD winch)	---	200 / 100 fpm	---
Counterweight	1000 lbs.	2000 lbs.	600 lbs.
Ballast Included	20 pcs.	40 pcs.	12 pcs.
Frame Weight	587 lbs.	691 lbs.	158 lbs.
Overall Height (to top of boom)	122 in.	153 in.	92 in.
Boom Overhang	55 in.	60 in.	48 in.

SH300 Swing Hoist Features & Benefits

- ▶ The tripod design provides rooftop stability.
- ▶ Lightweight components are easily transported and assembled.
- ▶ The boom locks for greater hoisting and unloading safety.
- ▶ Nesting ballast weights, in a convenient form, are included for additional safety.
- ▶ An optional fence is available to provide extra operator protection.
- ▶ This hoist is ideal for raising Swing Hoist and Trolley Hoist frames to the roof top.
- ▶ The SH300 is a 300 lb. capacity manually operated swing boom hoist.
- ▶ The SH300 with winch is a complete hoist with built-in handwinch for added convenience.



HydraWinch HD



HV1658S HydraPak

Swing Hoist HydraPaks

RGC HydraPaks are versatile single power sources that put reliable, efficient hydraulic power at the job site. These light weight portable power units are so adaptable that they can operate a Swing Hoist or a HydraSaw.

Available in 10, 11, 13, 16 and 18 HP gas models and a 7.5 HP electric model, all are equipped with a 6 gallon hydraulic oil reservoir, heavy-duty heat exchanger and lifting eye.

HydraPaks are cart-mounted and have pneumatic tires for easy transporting.

Shown above is an HV1658S HydraPak. It is equipped with a 16 HP B & S Vanguard engine with both electric and pull start, 5 or 8 gpm output, and winch and boom valves.

Most HydraPaks are available with an optional safety valve for the Swing Hoist Limit Switch.



SH300 Hand Swing Hoist w/ Hand Winch

Specifications

Winch Model	HW 1000S	HW2000S	HydraWinch HD
Capacity	1000 lbs.	1000/2000 lbs.	1000/2000 lbs.
Max. Lifting Speed	Up to 165 fpm	Up to 165 fpm (1 part line) Up to 82 fpm (2 parts line)	Up to 200 fpm (1 part line) Up to 100 fpm (2 parts line)
Cable Supplied	150 ft.	200 ft.	730 ft.
Cable Max.	300 ft.	300 ft.	730 ft.
Max. Lifting Height	285' @ 500 lbs.	285' @ 660 lbs.	700' @ 1000 lbs.
Weight (approx)	118 lbs.	124 lbs.	216 lbs.

Your one stop Roofing Supply



Ontario Roofing Supply Inc.
Quality Products & Metal Accessories

647-894.9464
Info@ontarioroofingsupplyinc.ca

51 ROYSUN RD., UNIT #9 , WOODBRIDGE, ON, L4L 8P9

Tel. 647-891.9464

Email: info@ontarioroofingsupplyinc.ca